

Cyclone 4



A compact, weather-resistant two-way loudspeaker designed for reliable performance

**FREQUENCY RESPONSE¹**

85 Hz – 17.8 kHz

**MAXIMUM OUTPUT²**

101 dB cont, 107 dB peak

**NOMINAL DISPERSION**

80°H x 80°V

**POWER HANDLING**

30 W AES

Beach & Poolside

Hotels & Resorts

Residential

Gyms & Fitness

Restaurants & Cafés

Retail

The Cyclone 4 is a two-way loudspeaker designed for consistent performance in outdoor environments. Its weather-protected enclosure, UV resilient finish and stainless steel components support reliable use in a wide-range of conditions, while its small form allows for discreet installation.

A conical 80° dispersion pattern supports even coverage, while a two-way driver configuration delivers balanced sound. The non-resonant ABS enclosure helps maintain clarity, ensuring consistent performance across different environments.

Designed for ease of installation, the Cyclone 4 is supplied with an aluminium T51 wall bracket for quick and secure fitting.

KEY FEATURES

Passive 4 inch coaxial loudspeaker

Weather-resistant input glands with Phoenix connector and link-through functionality

Compact ABS enclosure

Conical 80° dispersion

16 Ω impedance allowing scalable system wiring

Stainless steel grille and fasteners

Weather-protected with an IP-55 rating

UV-resilient finish


Available as standard in red with a black grille, black with a black grille, and white with a white grille

Custom RAL and KROME finishes are available upon request

SPECIFICATIONS

Frequency response ¹	85 Hz – 17.8 kHz	Suggested Minimum Amplifier	Inca 500/Bias Q1+
Maximum Output ²	101 dB cont, 107 dB peak	Weight	1.3 kg (2.9 lbs)
Nominal Dispersion	80°H x 80°V	IP Rating	IP-55
Sensitivity ³	87 dB 1W/1m	Connections	Phoenix connector with link out
Driver Configuration	1 x 4" LF, 1 x 0.75" soft dome HF tweeter	Enclosure	ABS
Power Handling	30 W AES	Finish	Smooth cellulose
Nominal Impedance	16 Ω	Mounting	Wall bracket included, Type 51 plate

¹-10 dB IEC60268-5 ²Calculated ³Measured in half space

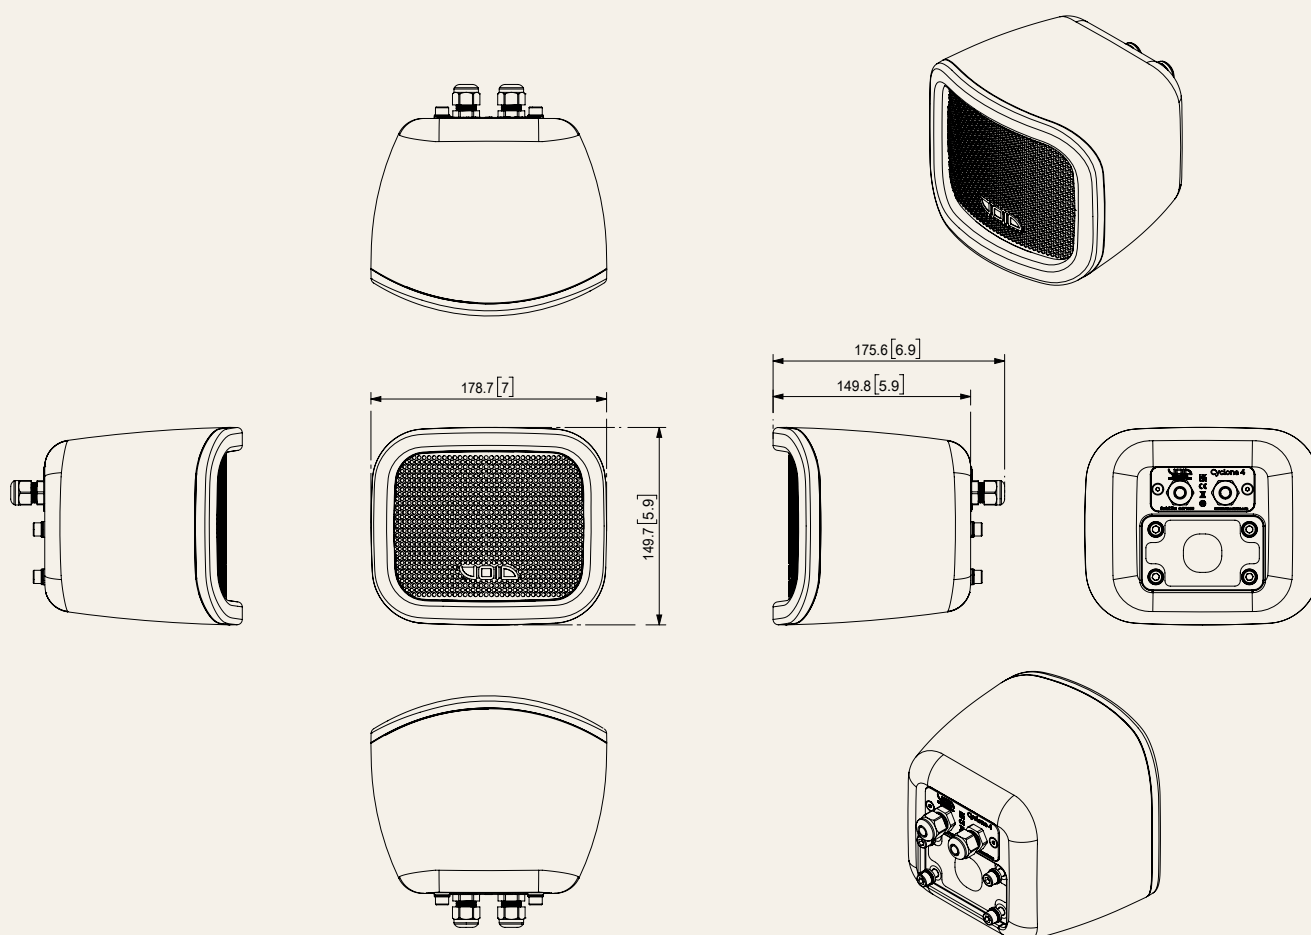

© 2026 Void Acoustics Research Ltd.

This information is subject to change without notice. For the latest online version, visit: voidacoustics.com Void Acoustics and the Void logo are registered trademarks of Void Acoustics Research Ltd. in the United Kingdom, USA and other countries; all other Void trademarks are the property of Void Acoustics Research Ltd.