

# Cyclone 4



A compact, weather-resistant two-way loudspeaker designed for reliable performance



#### FREQUENCY RESPONSE<sup>1</sup>

85 Hz – 17.8 kHz



#### MAXIMUM OUTPUT<sup>2</sup>

101 dB cont, 107 dB peak



#### NOMINAL DISPERSION

80°H x 80°V



#### POWER HANDLING

30 W AES

Beach & Poolside

Hotels & Resorts

Residential

Gyms & Fitness

Restaurants & Cafés

Retail

The Cyclone 4 is a two-way loudspeaker designed for consistent performance in outdoor environments. Its weather-protected enclosure, UV resilient finish and stainless steel components support reliable use in a wide-range of conditions, while its small form allows for discreet installation.

A conical 80° dispersion pattern supports even coverage, while a two-way driver configuration delivers balanced sound. The non-resonant ABS enclosure helps maintain clarity, ensuring consistent performance across different environments.

Designed for ease of installation, the Cyclone 4 is supplied with an aluminium T51 wall bracket for quick and secure fitting.

#### KEY FEATURES

Passive 4 inch coaxial loudspeaker

Weather-resistant input glands with Phoenix connector and link-through functionality

Compact ABS enclosure

Conical 80° dispersion

16  $\Omega$  impedance allowing scalable system wiring

Stainless steel grille and fasteners

Weather-protected with an IP-55 rating

UV-resilient finish

Available as standard in red with a black grille, black with a black grille, and white with a white grille


Custom RAL and KROME finishes are available upon request

**SPECIFICATIONS**

<b>Frequency response<sup>1</sup></b>	85 Hz – 17.8 kHz
<b>Maximum Output<sup>2</sup></b>	101 dB cont, 107 dB peak
<b>Nominal Dispersion</b>	80°H x 80°V
<b>Sensitivity<sup>3</sup></b>	87 dB 1W/1m
<b>Driver Configuration</b>	1 x 4" LF, 1 x 0.75" soft dome HF tweeter
<b>Power Handling</b>	30 W AES
<b>Nominal Impedance</b>	16 Ω

<b>Suggested Minimum Amplifier</b>	Inca 500/Bias Q1+
<b>Weight</b>	1.3 kg (2.9 lbs)
<b>IP Rating</b>	IP-55
<b>Connections</b>	Phoenix connector with link out
<b>Enclosure</b>	ABS
<b>Finish</b>	Smooth cellulose
<b>Mounting</b>	Wall bracket included, Type 51 plate

<sup>1</sup>-10 dB IEC60268-5 <sup>2</sup>Calculated <sup>3</sup>Measured in half space

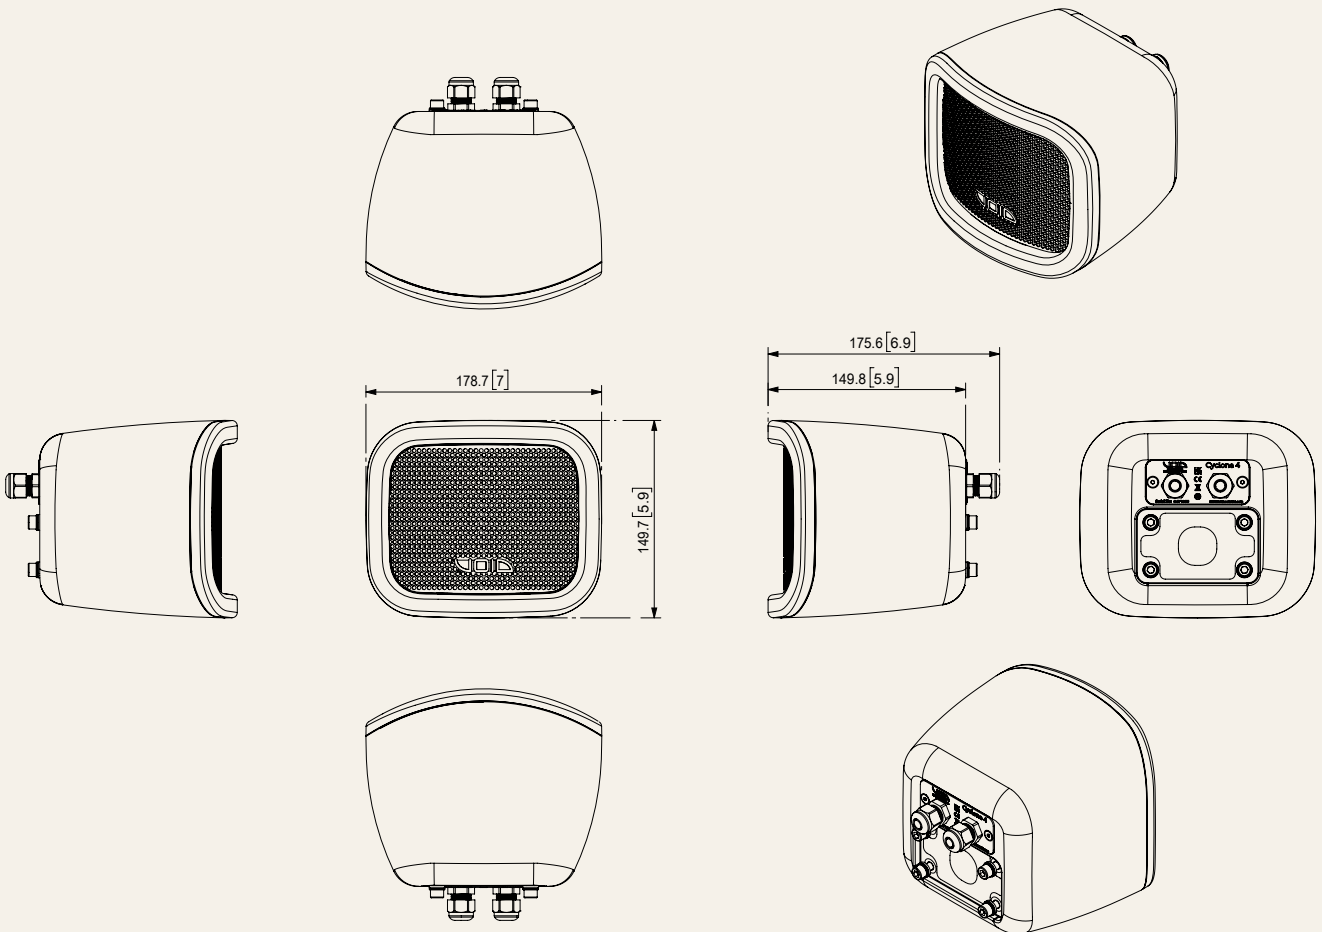

© 2026 Void Acoustics Research Ltd.

This information is subject to change without notice. For the latest online version, visit: [voidacoustics.com](http://voidacoustics.com) Void Acoustics and the Void logo are registered trademarks of Void Acoustics Research Ltd. in the United Kingdom, USA and other countries; all other Void trademarks are the property of Void Acoustics Research Ltd.