

Cyclone 208

A dual 8 inch subwoofer designed to extend low-frequency performance in compact systems



FREQUENCY RESPONSE¹

48 Hz – Preset dependent



MAXIMUM OUTPUT²

119 dB cont, 125 dB peak



SENSITIVITY³

95 dB 1W/1m



POWER HANDLING

300 W AES

Beach & Poolside

Hotels & Resorts

Residential

Gyms & Fitness

Restaurants & Cafés

Retail

The Cyclone 208 is a compact subwoofer designed to complement Cyclone loudspeakers and complete a full system. Its dual 8 inch low-frequency drivers and reflex-loaded enclosure support extended low-frequency performance, while its discreet form allows installation in environments where space is limited.

Dual 8 inch low-frequency transducers combined with a low-resonance fibreglass enclosure support strong output and low-frequency extension. The reflex-loaded design helps maintain consistent performance across a range of installation environments.

Designed to pair with Cyclone 4 and Cyclone 55, the Cyclone 208 enables system expansion in small environments. Its compact form and ground stack bracket support flexible placement where floor space is at a premium.

KEY FEATURES

Reflex-loaded dual 8 inch subwoofer

Weather-resistant input glands with Phoenix connector and link-through functionality

Adds low-frequency support to compact systems

Stainless steel grille and fasteners

Ground stack bracket included

Discreet form allows installation in small spaces

UV-resilient finish


Available as standard in red with a black grille, black with a black grille, and white with a white grille

Custom RAL and KROME finishes are available upon request

SPECIFICATIONS

Frequency response¹	48 Hz – Preset dependent	Suggested Minimum Amplifier	Bias Q1+
Maximum Output²	119 dB cont, 125 dB peak	IP Rating	IP-10
Nominal Dispersion	Omnidirectional	Weight	22 kg (48.5 lbs)
Sensitivity³	95 dB 1W/1m	Connections	Phoenix connector with link out
Driver Configuration	2 x 8" LF	Enclosure	Fibreglass composite
Power Handling	300 W AES	Finish	Smooth cellulose
Nominal Impedance	8 Ω	Mounting	Ground stack bracket included

¹-10 dB IEC60268-5 ²Calculated ³Measured in half space

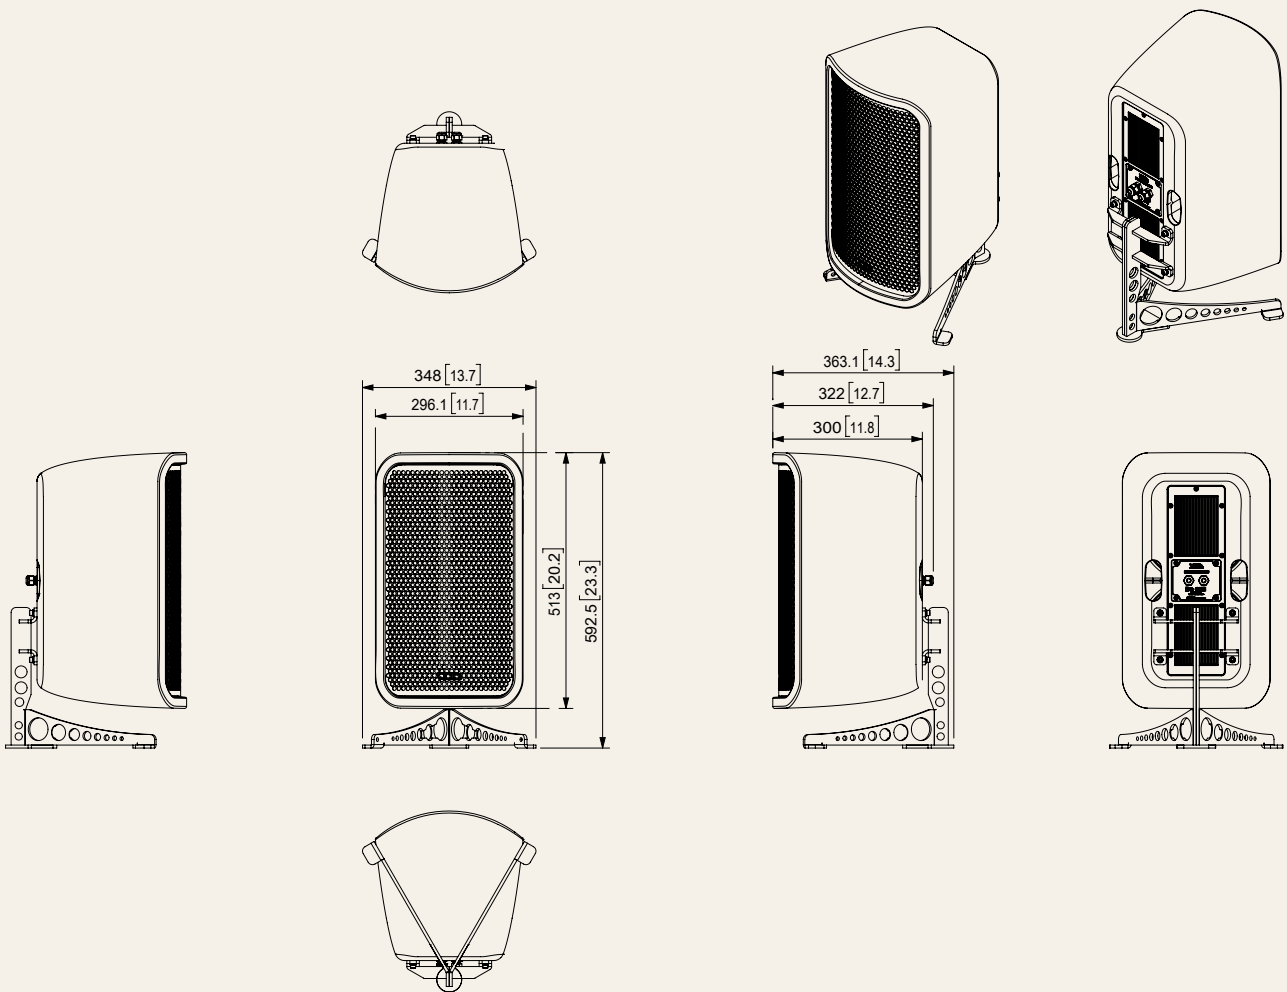

© 2026 Void Acoustics Research Ltd.

This information is subject to change without notice. For the latest online version, visit: voidacoustics.com Void Acoustics and the Void logo are registered trademarks of Void Acoustics Research Ltd. in the United Kingdom, USA and other countries; all other Void trademarks are the property of Void Acoustics Research Ltd.