

Venu 215i V2



A flagship active-dual 15 inch subwoofer delivering high-output with integrated amplification and DSP for simplified system design



FREQUENCY RESPONSE¹

33 Hz – Preset dependent



MAXIMUM OUTPUT²

130 dB cont, 136 dB peak



OUTPUTS

2x 4-pin locking connector outputs



POWER INPUT

powerCON™

Nightclubs & Bars

Hotels & Resorts

Retail

Gyms & Fitness

Restaurants & Cafés

Residential

The Venu 215i V2 is the most powerful model in the Venu active range, designed to deliver high-output and extended low-frequency performance. Its dual 15 inch configuration and integrated amplification make it ideal for larger venues requiring high-output, extended low-frequency performance with simplified system deployment.

With built-in amplification and DSP, the Venu 215i V2 is capable of powering multiple mid-high loudspeakers directly, reducing system complexity. Its high-output capability and onboard processing ensure reliable performance across demanding installation environments.

The Venu 215i V2 features an optional top-hat providing a standard M20 mounting point for satellite loudspeaker installation, while an optional castor kit supports easier transport and deployment.

Available as standard in black with a black grille or white with a white grille, the Venu Series is also offered in two Natural Wood body finishes, Barewood and Vintage.

KEY FEATURES

Active, dual 15 inch subwoofer with on board 2400w amplification module

Two 750 W outputs (4 Ω) via locking loudspeaker connectors

Built in DSP with 4 preset banks

Stereo XLR and 1/4" Jack input connectors

Compatible with the Void preset library

Tough, high-excursion neodymium transducers with 3 inch voice coil and FEM optimised motor

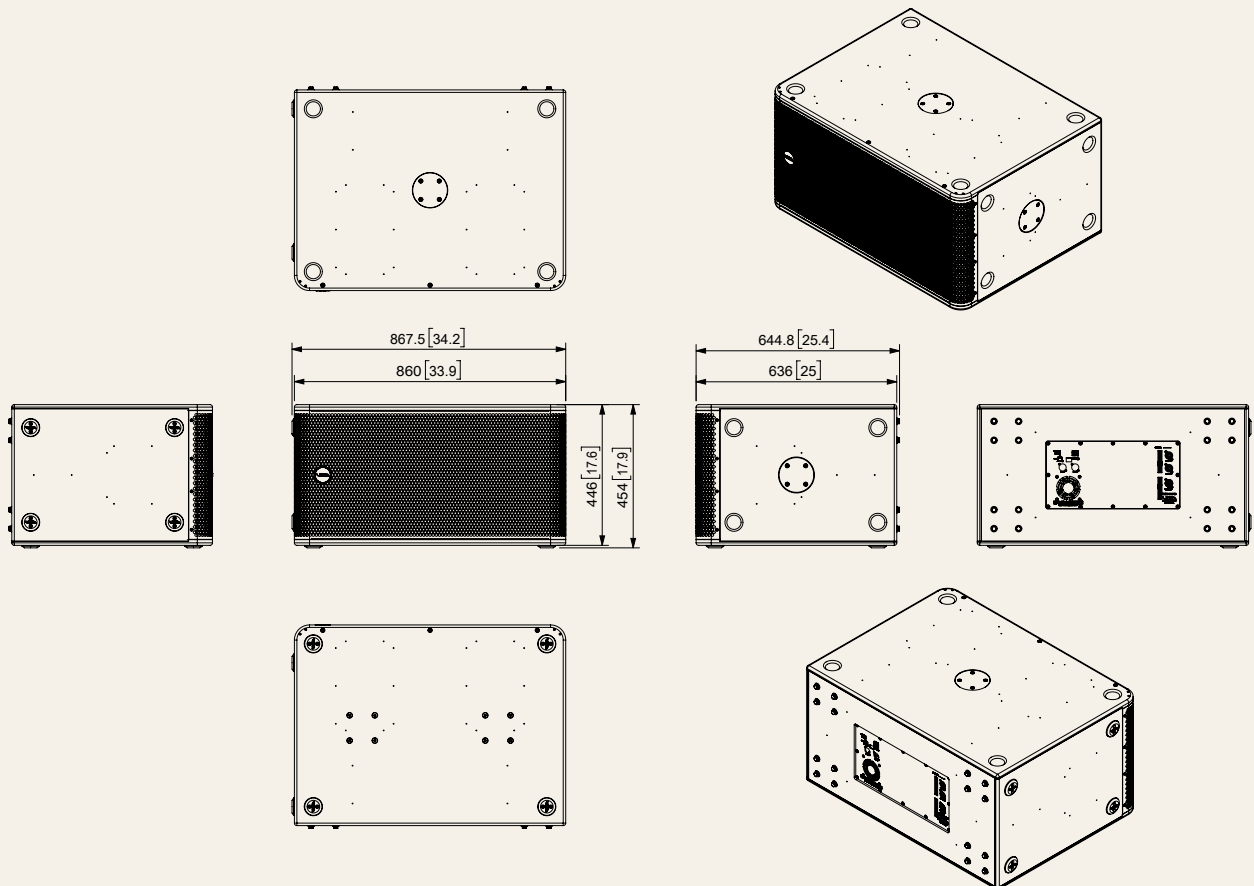
Optional castor kit available

Optional top-hat providing a standard M20 mounting point

Custom RAL finishes are available for both the body and grille, with KROME grille finishes available upon request

SPECIFICATIONS

Frequency response¹	33 Hz – Preset dependent	Outputs	2x 4-pin locking connector outputs
Maximum Output²	130 dB cont, 136 dB peak	Weight	57 kg (125.7 lbs)
Nominal Dispersion	Array dependent	IP Rating	IP-10
Driver Configuration	2 x 15" LF	Power Requirement	AC 100 V – 240 V, 50/60 Hz with PFC
Power Input	powerCON™	Power Consumption	Standby: <1W, Idle: 10.2W, 1/4 Max Load @8Ω: 700W
Amplifier Output	Up to 1400W (for Sub) & 2 x 750 W at 4 Ω (400 W at 8 Ω)	Enclosure	15 mm birch plywood
AD/DA	24-bit, 48 kHz	Finish	Textured polyurethane
Onboard Presets	4	Mounting	Optional M20 top hat
Input	2x Combo XLR and 1/4" Jack		

¹-10 dB IEC60268-5 ²Calculated


© 2026 Void Acoustics Research Ltd.

This information is subject to change without notice. For the latest online version, visit: voidacoustics.com Void Acoustics and the Void logo are registered trademarks of Void Acoustics Research Ltd. in the United Kingdom, USA and other countries; all other Void trademarks are the property of Void Acoustics Research Ltd.