

# Cyclone 55



A dual 5 inch loudspeaker designed for wide-coverage and weather-resistant performance



**FREQUENCY RESPONSE<sup>1</sup>**

55 Hz – 20 kHz



**MAXIMUM OUTPUT<sup>2</sup>**

112 dB cont, 118 dB peak



**NOMINAL DISPERSION**

110°H x 70°V



**POWER HANDLING**

120 W AES

Beach & Poolside

Hotels & Resorts

Residential

Gyms & Fitness

Restaurants & Cafés

Retail

The Cyclone 55 is a dual 5 inch surface-mount loudspeaker designed to deliver clear, consistent sound across wide areas. Its fibreglass composite enclosure and UV-resilient finish support reliable performance in outdoor environments, while its style-led form allows installation in design-focused spaces.

The wide 110° horizontal dispersion pattern supports even sound coverage, helping reduce the number of loudspeakers required. The dual driver configuration delivers clear and defined sound, maintaining consistency across both indoor and outdoor environments.

Designed for ease of installation, the Cyclone 55 is supplied with an aluminium T51 wall bracket.

## KEY FEATURES

Passive dual 5 inch two-way surface-mount loudspeaker

Weather-resistant input glands with Phoenix connector and link-through functionality

Low-resonance fibreglass composite construction

Wide 110° horizontal dispersion pattern

16  $\Omega$  impedance allowing scalable system wiring

Stainless steel grille and fasteners

Weather-protected with an IP-55 rating

UV-resilient finish


Available as standard in red with a black grille, black with a black grille, and white with a white grille

Custom RAL and KROME finishes are available upon request

## SPECIFICATIONS

|                                 |                                         |                             |                                      |
|---------------------------------|-----------------------------------------|-----------------------------|--------------------------------------|
| Frequency response <sup>1</sup> | 55 Hz – 20 kHz                          | Suggested Minimum Amplifier | Inca 500/Bias Q1+                    |
| Maximum Output <sup>2</sup>     | 112 dB cont, 118 dB peak                | Weight                      | 5 kg (11 lbs)                        |
| Nominal Dispersion              | 110°H x 70°V                            | IP Rating                   | IP-55                                |
| Sensitivity <sup>3</sup>        | 92 dB 1W/1m                             | Connections                 | Phoenix connector with link out      |
| Driver Configuration            | 2 x 5" LF, 2 x 1" soft dome HF tweeters | Enclosure                   | Fibreglass composite                 |
| Power Handling                  | 120 W AES                               | Finish                      | Smooth cellulose                     |
| Nominal Impedance               | 16 $\Omega$                             | Mounting                    | Wall bracket included, Type 51 plate |

<sup>1</sup>-10 dB IEC60268-5 <sup>2</sup>Calculated <sup>3</sup>Measured in half space

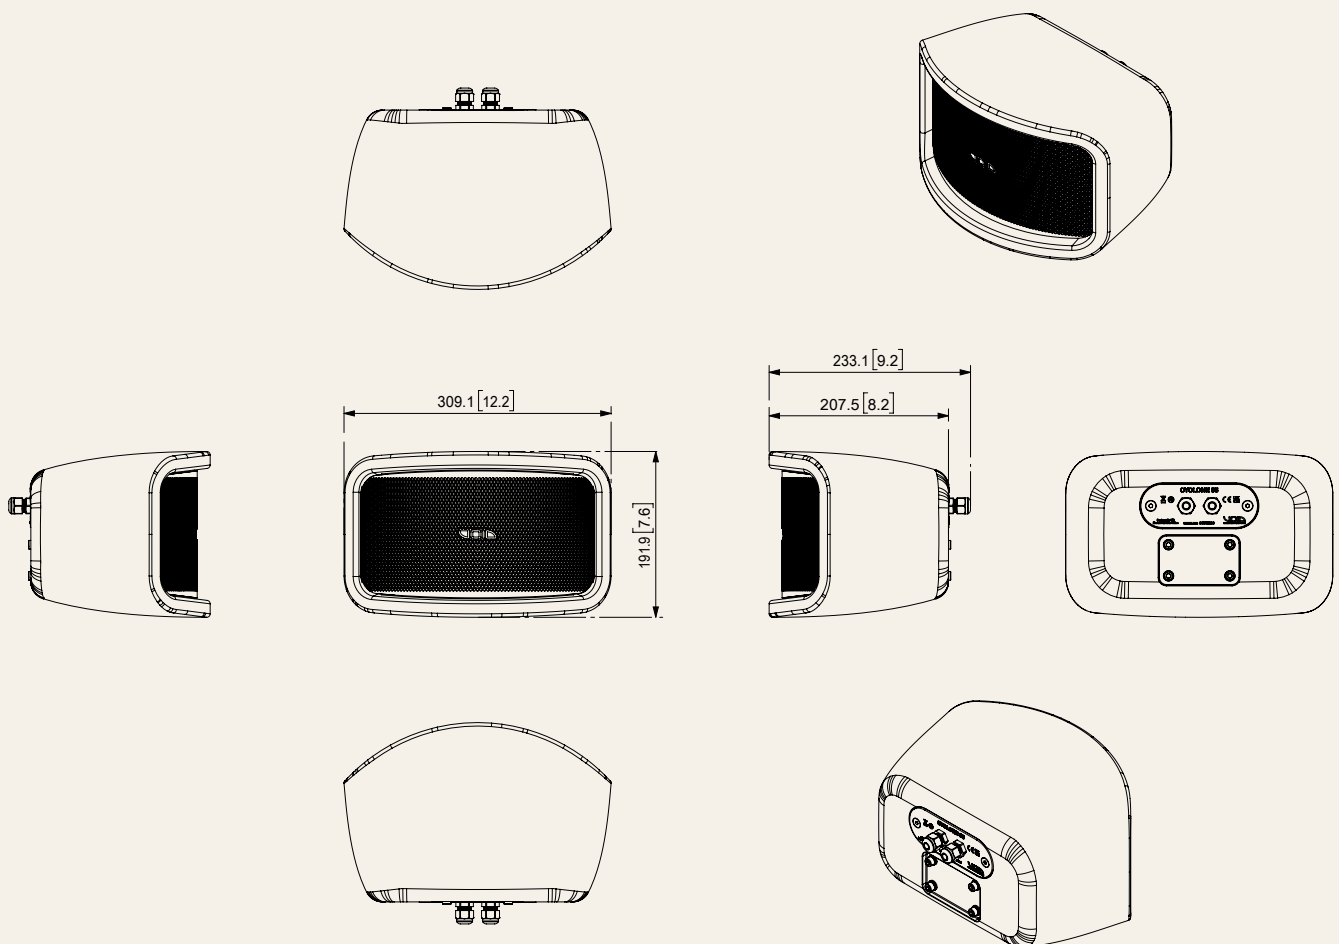

© 2026 Void Acoustics Research Ltd.

This information is subject to change without notice. For the latest online version, visit: [voidacoustics.com](https://voidacoustics.com) Void Acoustics and the Void logo are registered trademarks of Void Acoustics Research Ltd. in the United Kingdom, USA and other countries; all other Void trademarks are the property of Void Acoustics Research Ltd.