

Cyclone 10



A 10 inch two-way loudspeaker designed for high output and weather-resistant performance



FREQUENCY RESPONSE¹

75 Hz – 20 kHz



MAXIMUM OUTPUT²

122 dB cont, 128 dB peak



NOMINAL DISPERSION

80°H x 60°V



POWER HANDLING

350 W AES

Beach & Poolside

Hotels & Resorts

Residential

Gyms & Fitness

Restaurants & Cafés

Retail

The Cyclone 10 is a 10 inch two-way surface mount loudspeaker designed to deliver full range sound across large spaces. Its fibreglass composite enclosure and UV-resilient finish support reliable performance, while its IP-55 rating allows for use in both indoor and outdoor environments.

A 10 inch low-frequency driver with a high-frequency compression driver delivers full range performance with controlled 80°H x 60°V dispersion. The non-resonant enclosure supports clarity and consistency, maintaining reliable sound across a range of environments.

Designed for ease of installation, the Cyclone 10 supports flexible mounting with T80-style fixing points, providing a wide range of adjustment for secure positioning.

KEY FEATURES

Passive 10 inch two-way surface-mount loudspeaker

Weather-resistant input glands with Phoenix connector and link-through functionality

Low-resonance fibreglass composite construction

Controlled 80°H x 60°V dispersion pattern

Full range reflex-loaded design

Stainless steel grille and fasteners

Weather-protected with an IP-55 rating

UV-resilient finish

Available as standard in red with a black grille, black with a black grille, and white with a white grille


Custom RAL and KROME finishes are available upon request

SPECIFICATIONS

Frequency response¹	75 Hz – 20 kHz
Maximum Output²	122 dB cont, 128 dB peak
Nominal Dispersion	80°H x 60°V
Sensitivity³	97 dB 1W/1m
Driver Configuration	1 x 10" LF, 1 x 1" HF compression driver
Power Handling	350 W AES
Nominal Impedance	8 Ω

Suggested Minimum Amplifier	Bias Q1.5+
IP Rating	IP-55
Weight	14.5 kg (32 lbs)
Connections	Phoenix connector with link out
Enclosure	Fibreglass composite
Finish	Smooth cellulose
Mounting	Type 80 plate

¹-10 dB IEC60268-5 ²Calculated ³Measured in half space

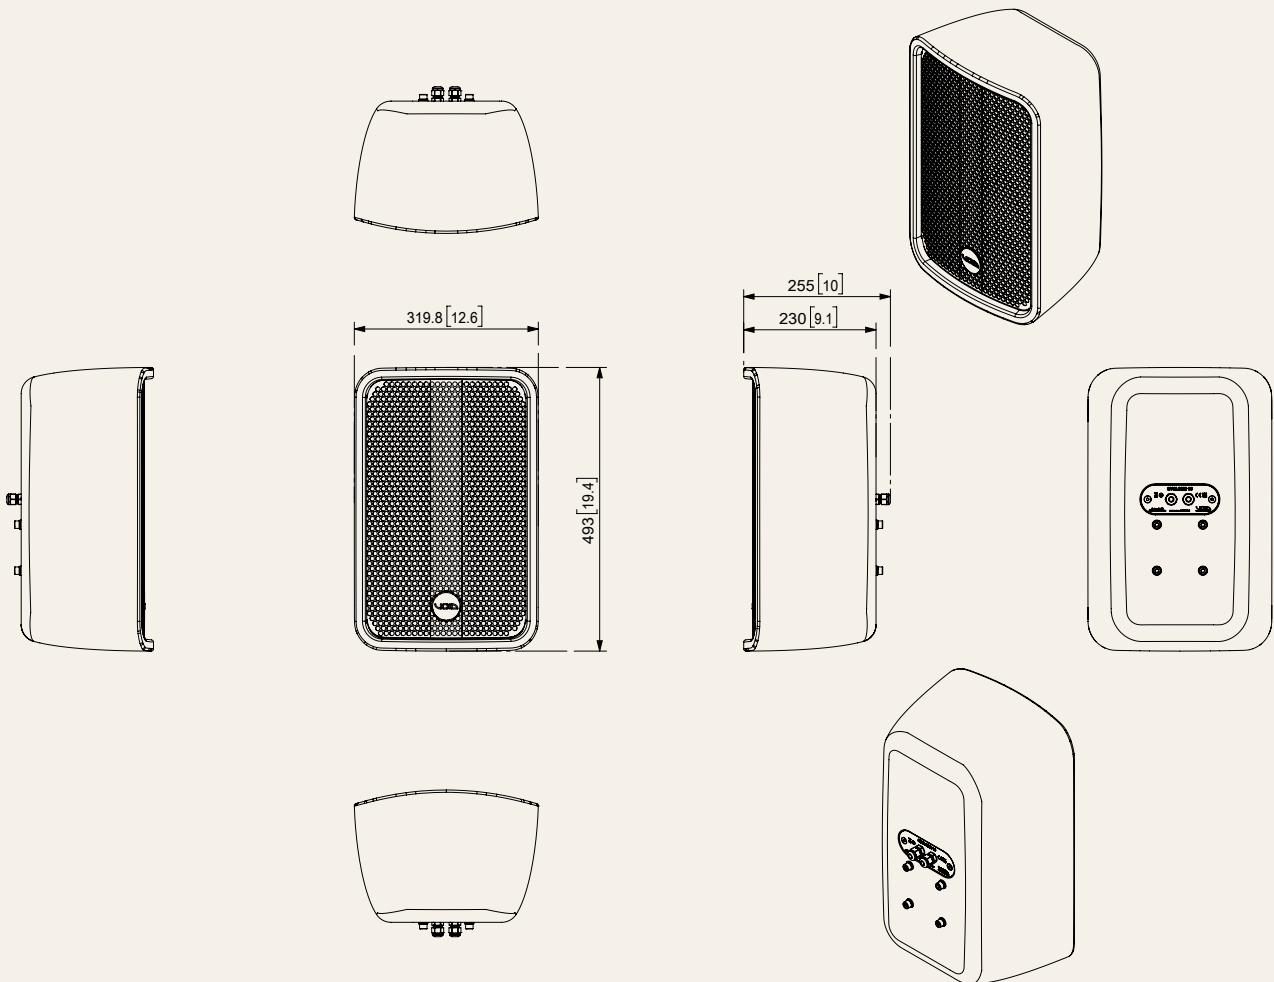

© 2026 Void Acoustics Research Ltd.

This information is subject to change without notice. For the latest online version, visit: voidacoustics.com Void Acoustics and the Void logo are registered trademarks of Void Acoustics Research Ltd. in the United Kingdom, USA and other countries; all other Void trademarks are the property of Void Acoustics Research Ltd.