

Cyclone Bass



A 12 inch subwoofer designed for low-frequency performance in outdoor environments



FREQUENCY RESPONSE¹

42 Hz – Preset dependent



MAXIMUM OUTPUT²

124 dB cont, 130 dB peak



SENSITIVITY³

94 dB 1W/1m



POWER HANDLING

600 W AES

Beach & Poolside

Hotels & Resorts

Residential

Gyms & Fitness

Restaurants & Cafés

Retail

The Cyclone Bass is a compact subwoofer designed to deliver low-frequency performance in outdoor and open environments. Its fibreglass composite enclosure, UV-resilient finish and IP-55 rating support reliable operation, while its form allows for integration into a range of applications.

A single high-powered 12 inch low-frequency driver delivers controlled low-frequency output. The reflex-loaded enclosure supports low-frequency extension, maintaining consistent performance across a range of environments.

Designed for ease of installation, the Cyclone Bass features weather-resistant input glands with Phoenix connector and link-through functionality for simple and efficient system integration.

KEY FEATURES

Reflex-loaded 12 inch subwoofer

Weather-resistant input glands with Phoenix connector and link-through functionality

Low-resonance fibreglass composite construction

Adds low-frequency support to compact systems

Weather-resistant cone treatment

T75-style fixing points for compatibility with a wide range of mounting options

Weather-protected with an IP-55 rating

UV-resilient finish


Available as standard in red with a black grille, black with a black grille, and white with a white grille

Custom RAL and KROME finishes are available upon request

SPECIFICATIONS

Frequency response¹	42 Hz – Preset dependent	Suggested Minimum Amplifier	Bias Q1.5+
Maximum Output²	124 dB cont, 130 dB peak	Weight	33.5 kg (73.9 lbs)
Nominal Dispersion	Omnidirectional	IP Rating	IP-55
Sensitivity³	94 dB 1W/1m	Connections	Phoenix connector with link out
Driver Configuration	1 x 12" LF	Enclosure	Fibreglass composite
Power Handling	600 W AES	Finish	Smooth cellulose
Nominal Impedance	8 Ω	Mounting	Type 75 plate

¹-10 dB IEC60268-5 ²Calculated ³Measured in half space

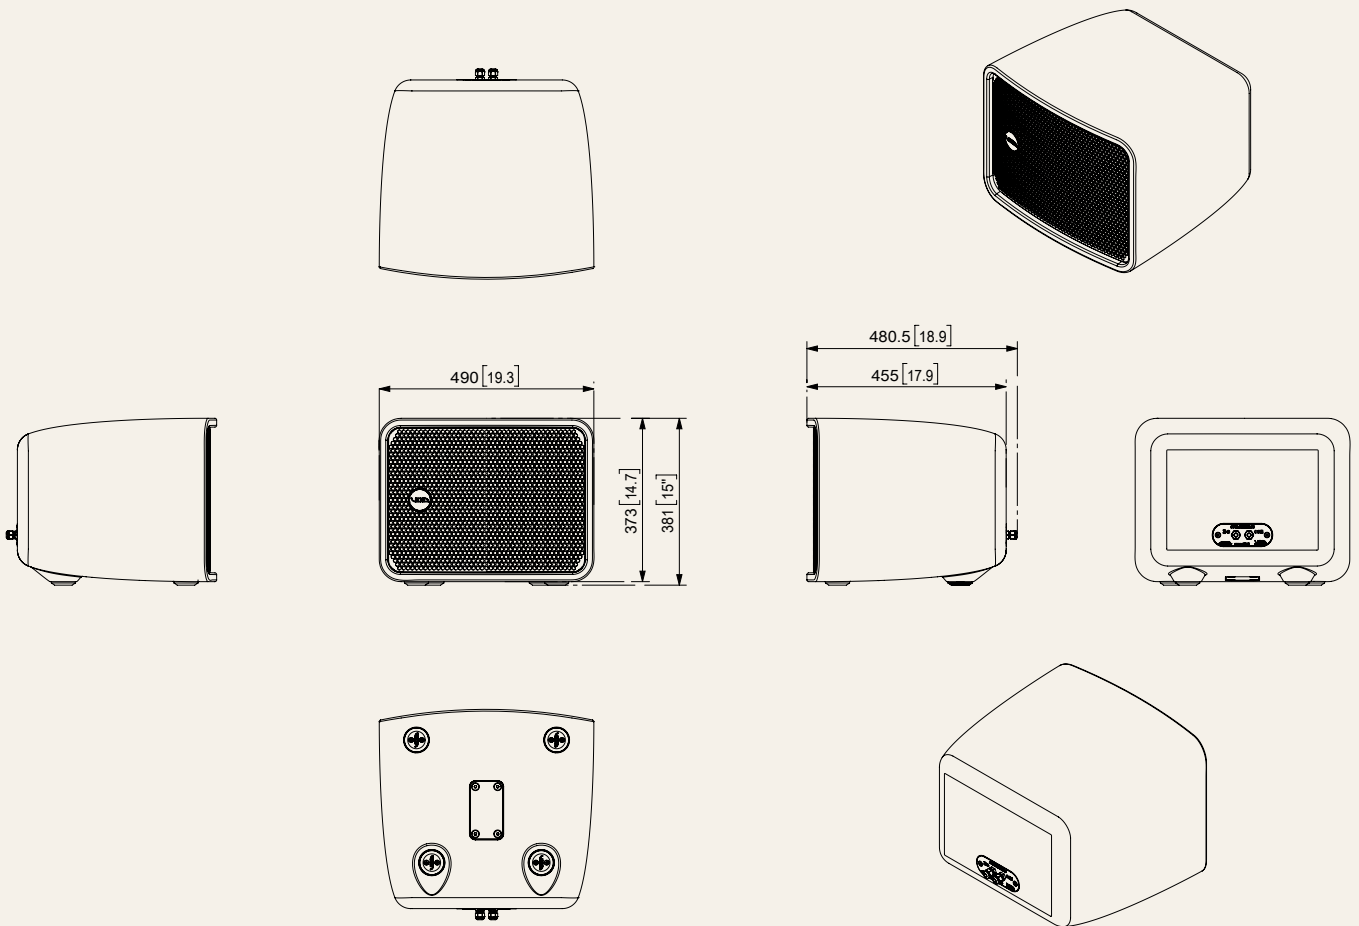

© 2026 Void Acoustics Research Ltd.

This information is subject to change without notice. For the latest online version, visit: voidacoustics.com Void Acoustics and the Void logo are registered trademarks of Void Acoustics Research Ltd. in the United Kingdom, USA and other countries; all other Void trademarks are the property of Void Acoustics Research Ltd.