

Air Motion



A distinctive three-way, bi-amped sculpted loudspeaker array defined by its iconic, unconventional design

**FREQUENCY RESPONSE¹**

135 Hz – 20 kHz

**MAXIMUM OUTPUT²**

132 dB cont, 138 dB peak

**NOMINAL DISPERSION**

60°H x 50°V

**POWER HANDLING**

LF: 500 W AES
MHF: 250 W AES

Nightclubs & Bars

Hotels & Resorts

Retail

Gyms & Fitness

Restaurants & Cafés

Festivals & Events

The Air Motion is a flagship model in the Air Series, combining distinctive design with high-performance audio engineering.

The Air Motion features a three-way configuration with three transducers, each loaded by a conical horn, delivering precise and consistent audio performance. The conical horn geometry provides optimised dispersion and stable directivity, enabling accurate beamwidth control across the listening area.

Designed for a range of environments, the Air Motion offers flexible installation through an integrated flying and mounting system, and is available in left and right configurations.

KEY FEATURES

Three-way, bi-amped sculpted loudspeaker array

Wide 60°H x 50°V dispersion for controlled coverage

FIR optimised preset with Void amplifiers

Low-resonance fibreglass composite construction

Integrated flying and mounting system

Visually-striking appearance for style-led environments

Available in left and right configurations

Available as standard in red, black, and white


Custom RAL and KROME finishes are available upon request

SPECIFICATIONS


Frequency response ¹	135 Hz – 20 kHz
Maximum Output ²	132 dB cont, 138 dB peak
Nominal Dispersion	60°H x 50°V
Sensitivity ³	LF: 106 dB 1W/1m, MHF: 108 dB 1W/1m
Driver Configuration	1 x 12" LF, 1 x 8" MF, 1 x 1.5" HF compression driver
Power Handling	LF: 500 W AES, MHF: 250 W AES
Nominal Impedance	LF: 8 Ω , MHF: 8 Ω

Suggested Minimum Amplifier	Bias Q1.5+
Weight	35.4 kg (78 lbs)
Connections	2 x 4-pin locking connector
Enclosure	Fibreglass composite
Finish	Smooth cellulose
Mounting	Integral mounting system

¹-10 dB IEC60268-5 ²Calculated ³Measured in half space

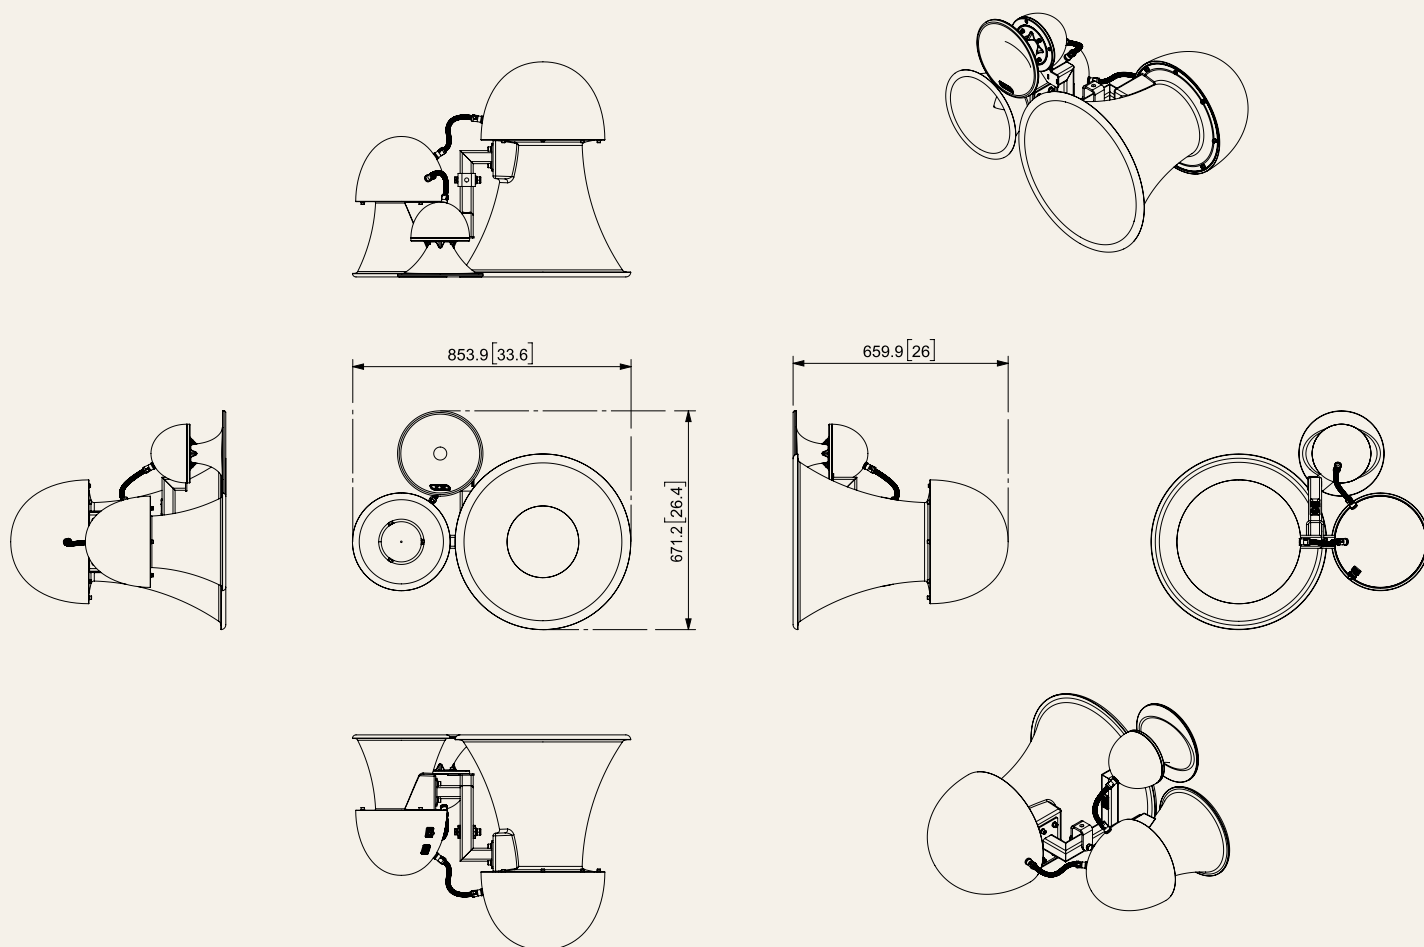

Left Configuration

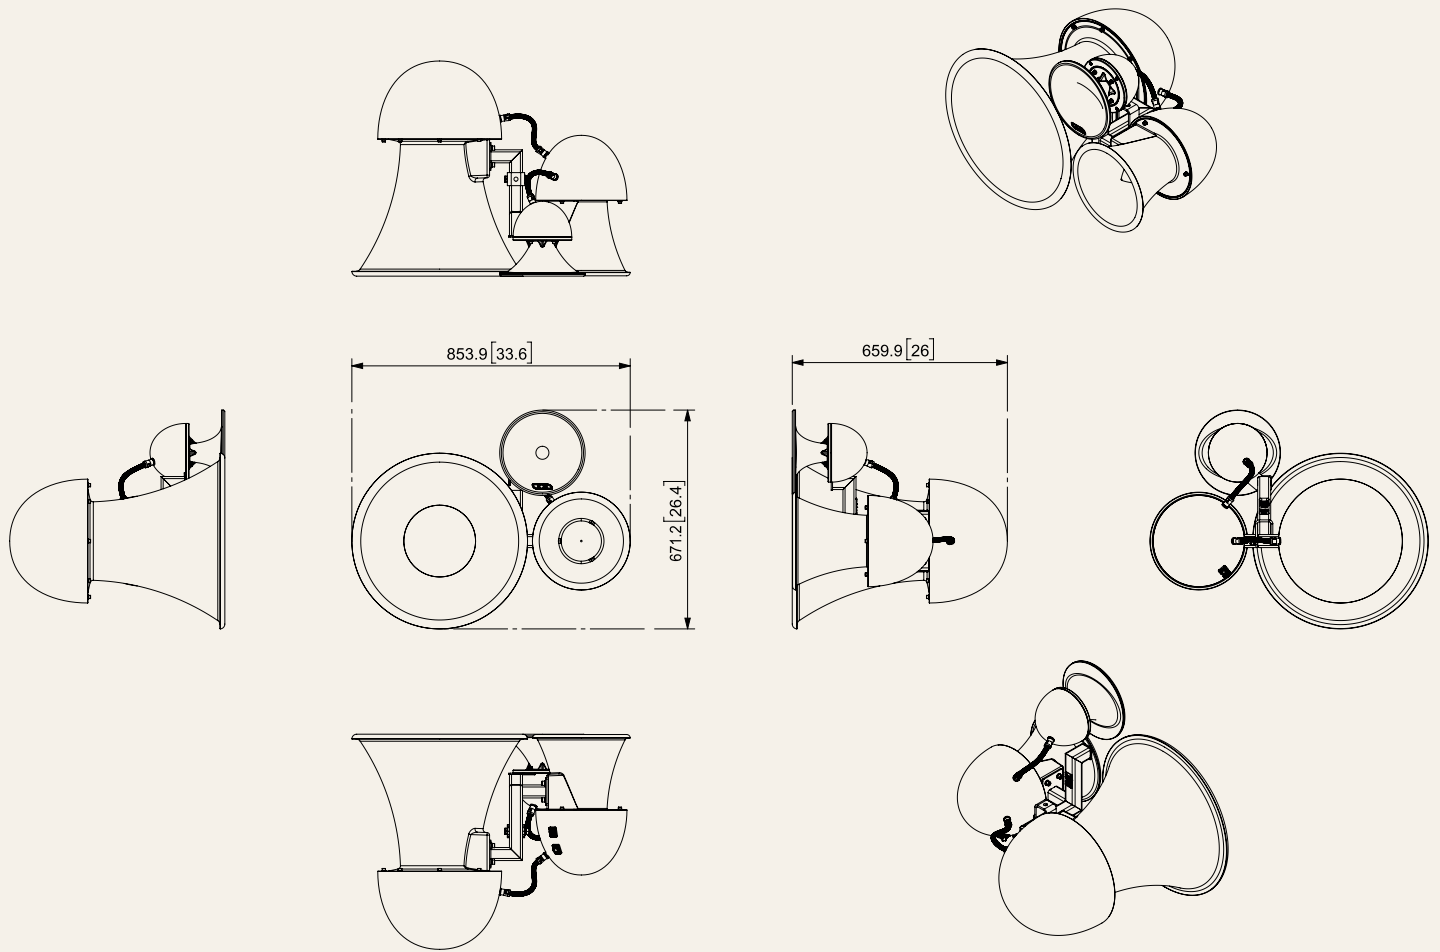

Right Configuration

© 2026 Void Acoustics Research Ltd.

This information is subject to change without notice. For the latest online version, visit: voidacoustics.com Void Acoustics and the Void logo are registered trademarks of Void Acoustics Research Ltd. in the United Kingdom, USA and other countries; all other Void trademarks are the property of Void Acoustics Research Ltd.

Air Stream



A loudspeaker designed for near-field monitoring with controlled dispersion for consistent coverage

**FREQUENCY RESPONSE¹**

65 Hz – 20 kHz

**MAXIMUM OUTPUT²**

134 dB cont, 140 dB peak

**NOMINAL DISPERSION**

70°H x 40°V

**POWER HANDLING**

LF: 700 W AES
MHF: 500 W AES

Nightclubs & Bars

The Air Stream is optimised for near-field applications, delivering point source radiation and phase coherent behaviour.

Point source radiation and phase coherent behaviour support true to source playback in near-field applications. The low-resonance fibreglass composite construction helps maintain clarity, while optimised configuration supports consistent performance.

Designed for a range of applications, the Air Stream features an integrated pole mount for straightforward installation.

KEY FEATURES

Designed for DJ monitoring

Controlled 70°H x 40°V dispersion for consistent coverage

Optimised for near-field applications

FIR optimised preset with Void amplifiers

Full range operational capabilities

Integrated pole mount

Low-resonance fibreglass composite construction

Visually-striking appearance for style led environments

Available as standard in red with a black grille, black with a black grille, and white with a white grille

Custom RAL and KROME finishes are available upon request