

# Air Motion



A distinctive three-way, bi-amped sculpted loudspeaker array defined by its iconic, unconventional design



#### FREQUENCY RESPONSE<sup>1</sup>

135 Hz – 20 kHz



#### MAXIMUM OUTPUT<sup>2</sup>

132 dB cont, 138 dB peak



#### NOMINAL DISPERSION

60°H x 50°V



#### POWER HANDLING

LF: 500 W AES  
MHF: 250 W AES

Nightclubs & Bars

Hotels & Resorts

Retail

Gyms & Fitness

Restaurants & Cafés

Festivals & Events

The Air Motion is a flagship model in the Air Series, combining distinctive design with high-performance audio engineering.

The Air Motion features a three-way configuration with three transducers, each loaded by a conical horn, delivering precise and consistent audio performance. The conical horn geometry provides optimised dispersion and stable directivity, enabling accurate beamwidth control across the listening area.

Designed for a range of environments, the Air Motion offers flexible installation through an integrated flying and mounting system, and is available in left and right configurations.

#### KEY FEATURES

Three-way, bi-amped sculpted loudspeaker array

Wide 60°H x 50°V dispersion for controlled coverage

FIR optimised preset with Void amplifiers

Low-resonance fibreglass composite construction

Integrated flying and mounting system

Visually-striking appearance for style-led environments

Available in left and right configurations

Available as standard in red, black, and white


Custom RAL and KROME finishes are available upon request

**SPECIFICATIONS**


|                                       |  |
|---------------------------------------|--|
| <b>Frequency response<sup>1</sup></b> | 135 Hz – 20 kHz  |
| <b>Maximum Output<sup>2</sup></b>     | 132 dB cont, 138 dB peak                                 |
| <b>Nominal Dispersion</b>             | 60°H x 50°V  |
| <b>Sensitivity<sup>3</sup></b>        | LF: 106 dB 1W/1m,<br>MHF: 108 dB 1W/1m                   |
| <b>Driver Configuration</b>           | 1 x 12" LF, 1 x 8" MF, 1 x 1.5" HF<br>compression driver |
| <b>Power Handling</b>                 | LF: 500 W AES, MHF: 250 W AES                            |
| <b>Nominal Impedance</b>              | LF: 8 Ω, MHF: 8 Ω  |

|                                    |                             |
|------------------------------------|-----------------------------|
| <b>Suggested Minimum Amplifier</b> | Bias Q1.5+                  |
| <b>Weight</b>                      | 35.4 kg (78 lbs)            |
| <b>Connections</b>                 | 2 x 4-pin locking connector |
| <b>Enclosure</b>                   | Fibreglass composite        |
| <b>Finish</b>                      | Smooth cellulose            |
| <b>Mounting</b>                    | Integral mounting system    |

<sup>1</sup>-10 dB IEC60268-5 <sup>2</sup>Calculated <sup>3</sup>Measured in half space

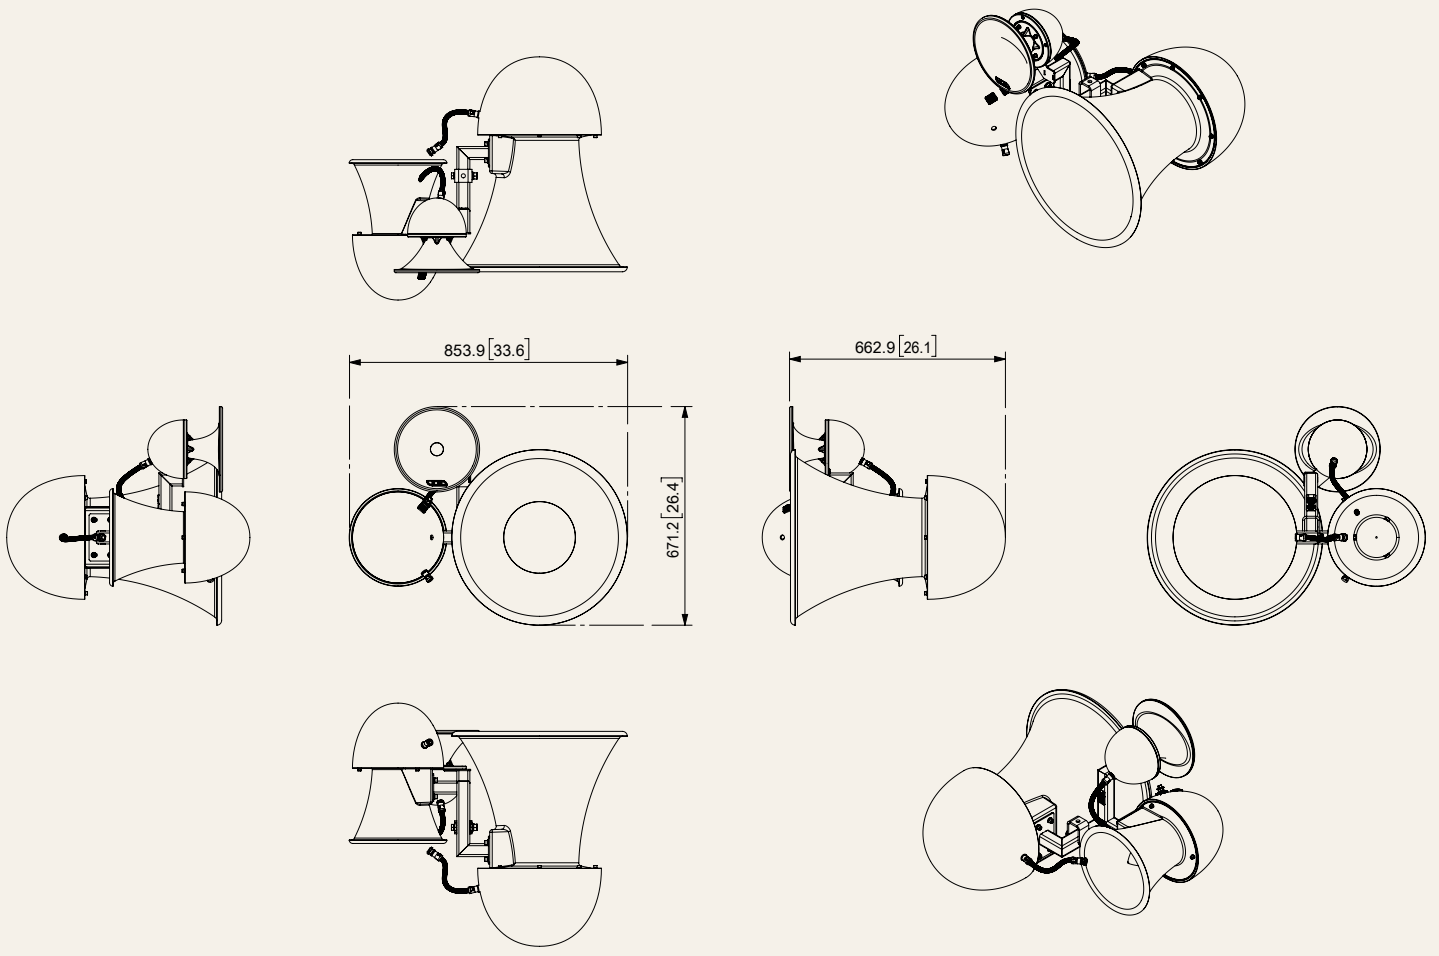

Right Configuration

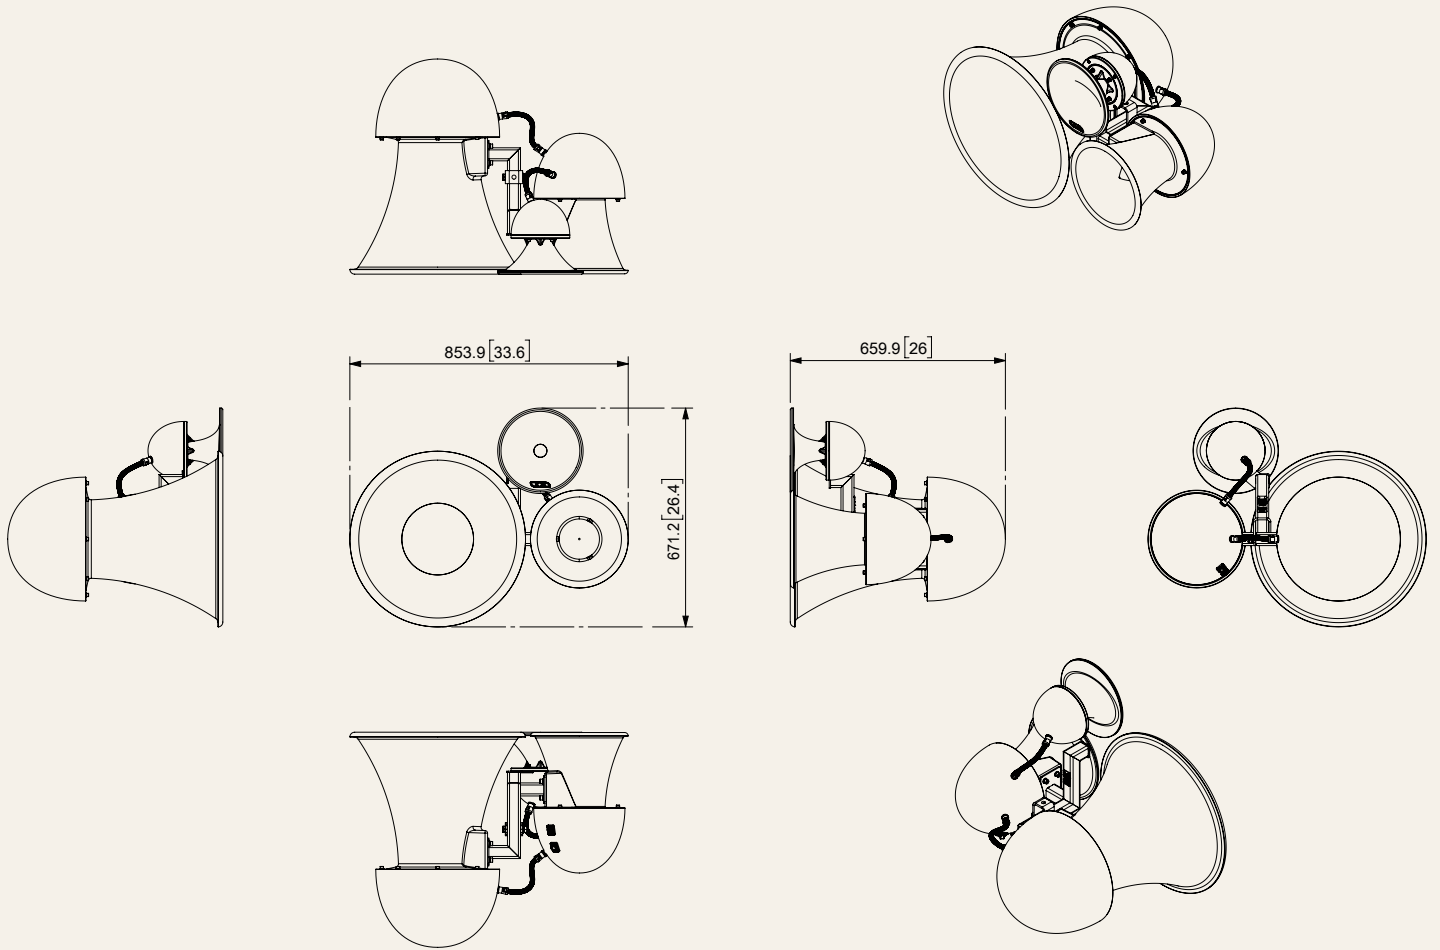

Left Configuration

© 2026 Void Acoustics Research Ltd.

This information is subject to change without notice. For the latest online version, visit: [voidacoustics.com](http://voidacoustics.com) Void Acoustics and the Void logo are registered trademarks of Void Acoustics Research Ltd. in the United Kingdom, USA and other countries; all other Void trademarks are the property of Void Acoustics Research Ltd.