

# Hyperfold

A folded horn upper-bass loudspeaker designed for high-output and fast transient performance



#### FREQUENCY RESPONSE<sup>1</sup>

55 Hz – 135 Hz



#### MAXIMUM OUTPUT<sup>2</sup>

146 dB cont, 152 dB peak



#### SENSITIVITY<sup>3</sup>

110 dB 1W/1m



#### POWER HANDLING

4000 W AES

Nightclubs & Bars

Festivals & Events

The Hyperfold is a folded horn upper-bass loudspeaker defined by its futuristic styling and distinctive aluminium bracing as part of the Incubus system. Designed for high-impact environments, its construction supports powerful and controlled output, making it suited to large scale systems and experienced applications.

Four high-power 15 inch low-frequency transducers deliver high-output with exceptional upper-bass speed and articulation. The folded horn design supports efficient performance with low-distortion, maintaining clarity at high sound levels.

Distinctive aluminium cabinet bracing provides visual impact while allowing for customisation to suit different environments.

#### KEY FEATURES

Compact, folded horn upper-bass loudspeaker

High-power density in a compact footprint

Exceptional upper-bass speed and articulation

Four high-power 15 inch low-frequency transducers

Distinctive aluminium cabinet bracing

18 mm birch plywood construction

Textured 'TourCoat' polyurea finish


Available as standard in black with a black grille, red horn, and red bracing

White finishes and custom RAL and KROME finishes for the horn and bracing are available upon request

SPECIFICATIONS

<b>Frequency response<sup>1</sup></b>	55 Hz – 135 Hz	<b>Nominal Impedance</b>	2 x 4 Ω
<b>Maximum Output<sup>2</sup></b>	146 dB cont, 152 dB peak	<b>Suggested Minimum Amplifier</b>	Bias Q5
<b>Nominal Dispersion</b>	Array dependent	<b>Weight</b>	150 kg (330.7 lbs)
<b>Sensitivity<sup>3</sup></b>	110 dB 1W/1m	<b>Connections</b>	2 x 4-pin locking connector
<b>Driver Configuration</b>	4 x 15" low frequency drivers	<b>Enclosure</b>	18 mm birch plywood
<b>Power Handling</b>	4000 W AES	<b>Finish</b>	Textured "TourCoat" polyurea, smooth cellulose

<sup>1</sup>-10 dB IEC60268-5 <sup>2</sup>Calculated <sup>3</sup>Measured in half space

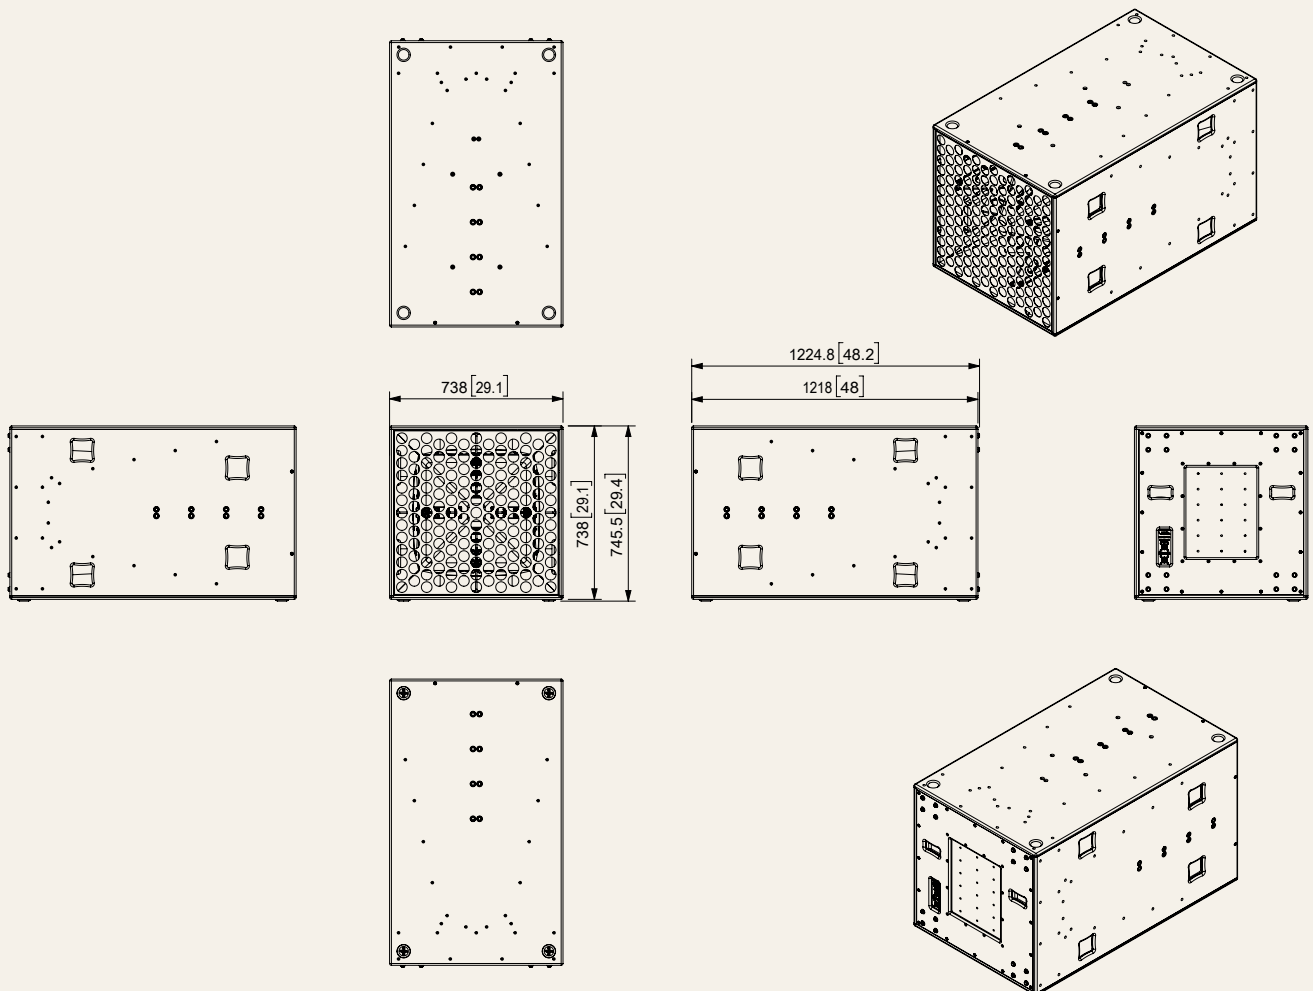

© 2026 Void Acoustics Research Ltd.

This information is subject to change without notice. For the latest online version, visit: [voidacoustics.com](http://voidacoustics.com) Void Acoustics and the Void logo are registered trademarks of Void Acoustics Research Ltd. in the United Kingdom, USA and other countries; all other Void trademarks are the property of Void Acoustics Research Ltd.