

# Nexus X



A high-power low-frequency enclosure delivering extremely high-output and deep-bass extension



#### FREQUENCY RESPONSE<sup>1</sup>

30 Hz – Preset dependent



#### MAXIMUM OUTPUT<sup>2</sup>

146 dB cont, 152 dB peak



#### SENSITIVITY<sup>3</sup>

108 dB 1W/1m



#### POWER HANDLING

2 x 4000 W AES

Nightclubs & Bars

Festivals & Events

The Nexus X is designed to deliver powerful, controlled low-frequency performance as part of the Nexus System. Its compact enclosure houses eight 12 inch transducers, extending down to 30 Hz with extremely high-output and low-distortion in demanding environments.

With eight 12 inch transducers working in unison, the Nexus X delivers exceptional output levels with minimal distortion. Its optimised enclosure design reduces resonance, ensuring efficient and controlled low-frequency performance even at high sound pressure levels.

The Nexus X integrates seamlessly within Nexus Systems and is designed for use with the Nexus Q upper-bass enclosure. Matching enclosure dimensions with the Nexus XL and Nexus Q support clean integration across large-scale nightclub, festival and live venue deployments.

#### KEY FEATURES

8000 W high-power output

Eight 12 inch transducers with extended linear excursion

High force factor results in articulate bass response

Matching enclosure dimensions with Nexus XL and Nexus Q

Extremely high power density with compact enclosure dimensions

Aluminium bracing minimises resonance

Dual 4-pin locking connector with link-through for quick and easy set up

Designed for use with Nexus Q upper-bass enclosure


Available as standard in black with red bracing

White finishes and custom RAL and KROME finishes for the bracing are available upon request

**SPECIFICATIONS**

<b>Frequency response<sup>1</sup></b>	30 Hz – Preset dependent	<b>Nominal Impedance</b>	2 x 4 Ω
<b>Maximum Output<sup>2</sup></b>	146 dB cont, 152 dB peak	<b>Suggested Minimum Amplifier</b>	Bias Q5
<b>Nominal Dispersion</b>	Array dependent	<b>Weight</b>	137 kg (302 lbs)
<b>Sensitivity<sup>3</sup></b>	108 dB 1W/1m	<b>Connections</b>	2 x 4-pin locking connector
<b>Driver Configuration</b>	8 x 12" LF	<b>Enclosure</b>	18 mm birch plywood
<b>Power Handling</b>	2 x 4000 W AES	<b>Finish</b>	Textured "TourCoat" polyurea

<sup>1</sup>-10 dB IEC60268-5 <sup>2</sup>Calculated <sup>3</sup>Measured in half space

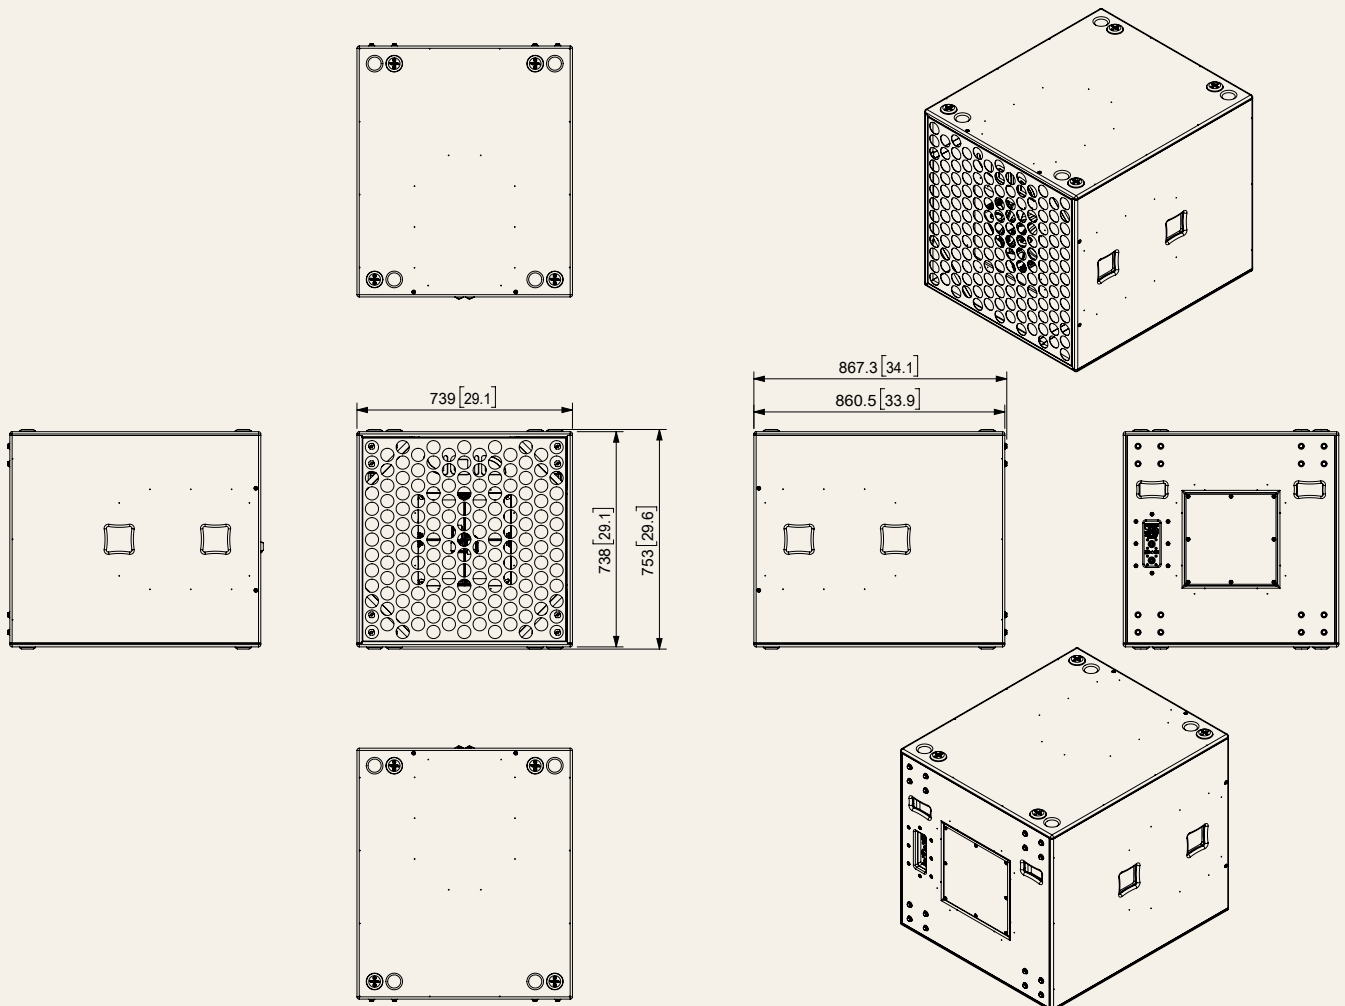

© 2026 Void Acoustics Research Ltd.

This information is subject to change without notice. For the latest online version, visit: [voidacoustics.com](http://voidacoustics.com) Void Acoustics and the Void logo are registered trademarks of Void Acoustics Research Ltd. in the United Kingdom, USA and other countries; all other Void trademarks are the property of Void Acoustics Research Ltd.