

Stasys XV2



A dual 18 inch horn-loaded subwoofer delivering high-output with improved control and reduced power compression



FREQUENCY RESPONSE¹

33 Hz – Preset dependent



MAXIMUM OUTPUT²

138 dB cont, 144 dB peak



SENSITIVITY³

104 dB 1W/1m



POWER HANDLING

3200 W AES

Nightclubs & Bars

Festivals & Events

The Stasys XV2 builds on the original Stasys X design, incorporating a refined internal chamber arrangement to improve overall system performance. This updated structure enhances cooling, reduces power compression and improves sound consistency in demanding touring environments.

The redesigned internal chamber layout of the Stasys XV2 enhances transient response, phase coherence and timing consistency compared to the original Stasys X design. This results in more uniform performance over distance and greater control in large-scale deployments.

Built for touring environments, the Stasys XV2 features a durable black textured 'TourCoat' polyurea finish designed to withstand transport and deployment. Its predictable performance supports large-scale touring and live sound applications.

KEY FEATURES

High-output, dual 18 inch, horn-loaded low-frequency enclosure

3200 Watts AES power handling

Negligible power compression

Fast transient response and extremely low group delay

Optional castors and protective covers

18 mm birch plywood construction

Black textured 'TourCoat' polyurea finish

Truck pack-friendly dimensions


Available as standard in black

White finishes are available upon request

SPECIFICATIONS

| | | | |
|---------------------------------------|--------------------------|------------------------------------|------------------------------|
| Frequency response¹ | 33 Hz – Preset dependent | Nominal Impedance | 4 Ω |
| Maximum Output² | 138 dB cont, 144 dB peak | Suggested Minimum Amplifier | Bias Q5 |
| Nominal Dispersion | Array dependent | Weight | 115 kg (253.5 lbs) |
| Sensitivity³ | 104 dB 1W/1m | Connections | 2 x 4-pin locking connector |
| Driver Configuration | 2 x 18" LF | Enclosure | 18 mm birch plywood |
| Power Handling | 3200 W AES | Finish | Textured "TourCoat" polyurea |

¹-10 dB IEC60268-5 ²Calculated ³Measured in half space

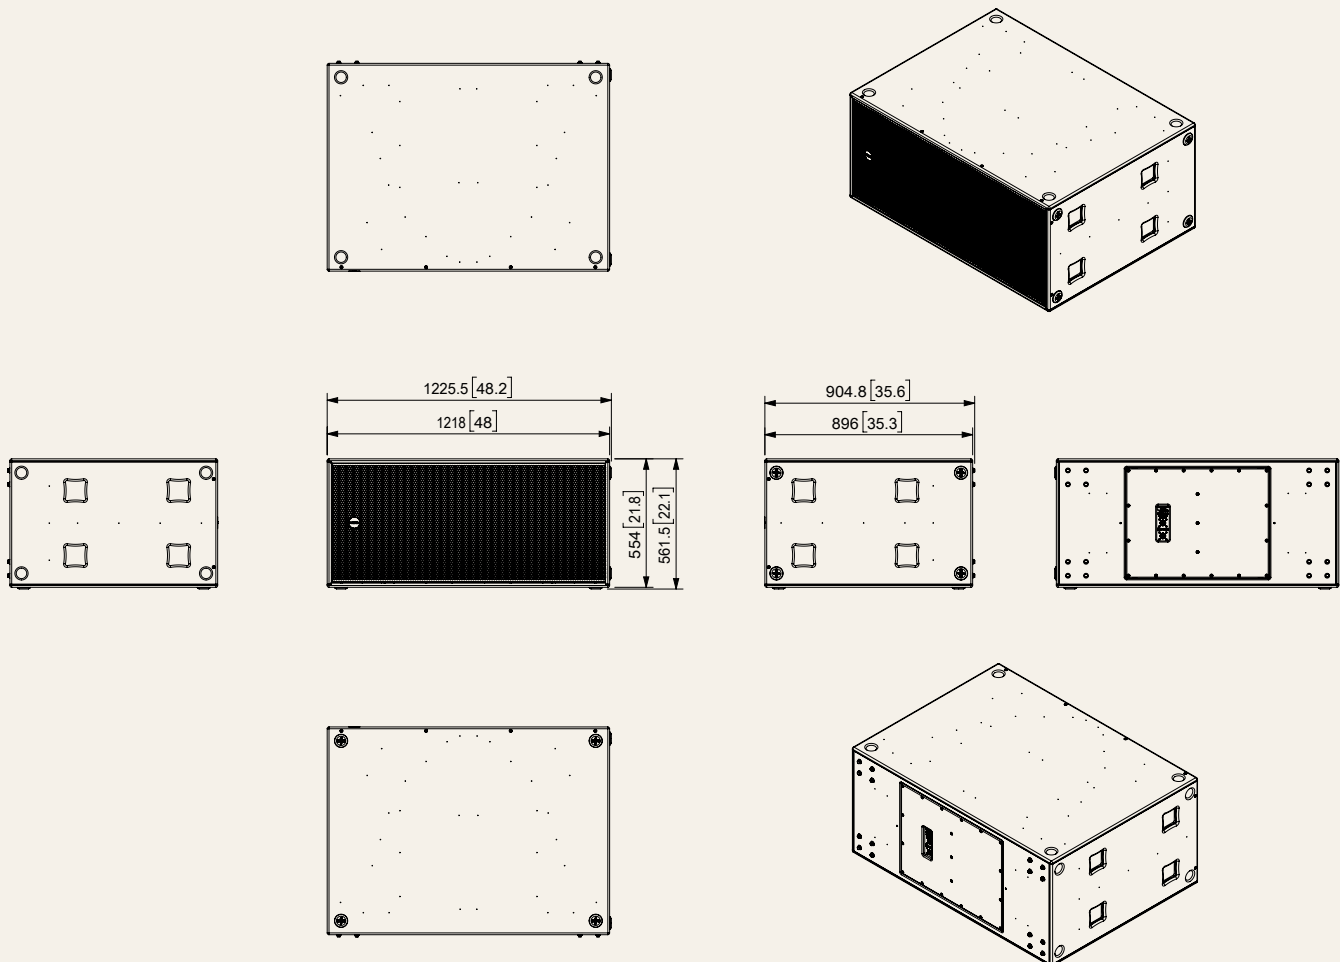

© 2026 Void Acoustics Research Ltd.

This information is subject to change without notice. For the latest online version, visit: voidacoustics.com Void Acoustics and the Void logo are registered trademarks of Void Acoustics Research Ltd. in the United Kingdom, USA and other countries; all other Void trademarks are the property of Void Acoustics Research Ltd.