

Venu 6 V2



A compact two-way loudspeaker designed for flexible installation and controlled coverage across interior environments



FREQUENCY RESPONSE¹

68 Hz – 20 kHz



MAXIMUM OUTPUT²

118 dB cont, 124 dB peak



NOMINAL DISPERSION

90°H x 60°V rotatable



POWER HANDLING

200 W AES

Nightclubs & Bars

Hotels & Resorts

Retail

Gyms & Fitness

Restaurants & Cafés

Residential

The Venu 6 V2 is designed for installation environments where performance and visual restraint are equally important. Its compact enclosure and clean form allow it to integrate easily across hospitality, retail and residential applications without drawing attention to the system.

The Venu 6 V2 features a rotatable 90°H x 60°V HF waveguide, allowing coverage to be adapted depending on orientation. A 6.5 inch low-frequency driver and 1 inch compression driver deliver balanced output, while 4-pin locking and Phoenix connectors provide flexible and reliable system integration.

Yoke brackets support both vertical and horizontal mounting. Type 80 plate mounting points are provided, compatible with a wide-range of accessories, with optional top-hat providing a standard 35mm pole mount.

Available as standard in black with a black grille or white with a white grille, the Venu Series is also offered in two Natural Wood body finishes, Barewood and Vintage.

KEY FEATURES

Passive 6.5 inch two-way surface-mount loudspeaker

4-pin locking connector and Phoenix connectors with link-through for quick and reliable hook ups

Rotatable 90°H x 60°V HF waveguide

1 inch exit high-frequency compression driver

Robust enclosure made entirely from 15 mm multi-laminate birch plywood

Rotatable badge

Yoke brackets support both vertical and horizontal mounting

T80-style fixing points for compatibility with a wide range of mounting options


Optional top-hat providing a standard 35mm pole mount

Custom RAL finishes are available for both the body and grille, with KROME grille finishes available upon request

SPECIFICATIONS

Frequency response¹	68 Hz – 20 kHz	Suggested Minimum Amplifier	Bias Q1+
Maximum Output²	118 dB cont, 124 dB peak	Weight	9.5 kg (20.9 lbs)
Nominal Dispersion	90°H x 60°V rotatable	Connections	1 x Phoenix with link out and 1 x 4-pin locking connector with link out
Sensitivity³	95 dB 1W/1m	Enclosure	15 mm birch plywood
Driver Configuration	1 x 6.5" LF, 1 x 1" HF compression driver	Finish	Textured polyurethane
Power Handling	200 W AES	Mounting	Yoke bracket, 4 x M8 fixing points for Type 80 plate, optional 35mm top hat
Nominal Impedance	8 Ω		

¹-10 dB IEC60268-5 ²Calculated ³Measured in half space

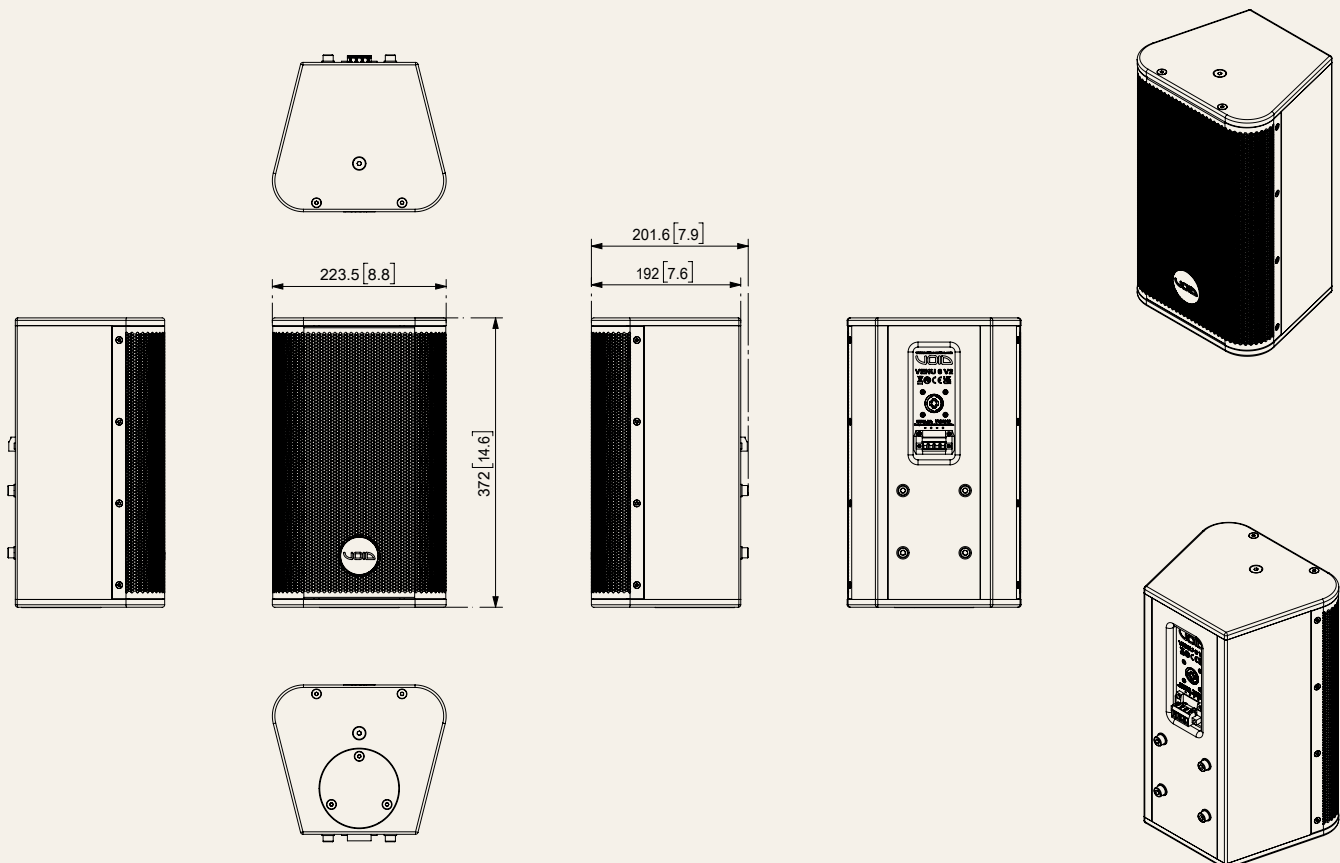

© 2026 Void Acoustics Research Ltd.

This information is subject to change without notice. For the latest online version, visit: voidacoustics.com Void Acoustics and the Void logo are registered trademarks of Void Acoustics Research Ltd. in the United Kingdom, USA and other countries; all other Void trademarks are the property of Void Acoustics Research Ltd.