


# Venu 8 V2



A compact two-way loudspeaker designed for flexible installation and controlled coverage across interior environments

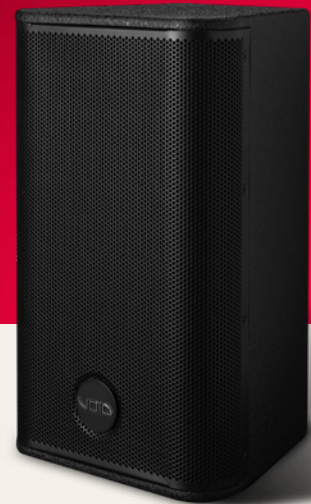

#### FREQUENCY RESPONSE<sup>1</sup>

63 Hz – 20 kHz



#### MAXIMUM OUTPUT<sup>2</sup>

121 dB cont, 127 dB peak



#### NOMINAL DISPERSION

90°/40°H x 60°V rotatable



#### POWER HANDLING

300 W AES

Nightclubs & Bars

Hotels & Resorts

Retail

Gyms & Fitness

Restaurants & Cafés

Residential

The Venu 8 V2 is designed for installation environments requiring high-output performance and flexible deployment without compromising visual restraint. Its enclosure and mounting options support seamless integration across hospitality, retail and leisure applications with consistent wide-area coverage.

The Venu 8 V2 features a rotatable high-frequency horn, allowing the dispersion pattern to be adapted for different orientations and applications. An 8 inch low-frequency driver and 1 inch compression driver deliver strong, balanced output, while electronic high-frequency protection supports long term reliability.

Yoke brackets support both vertical and horizontal mounting. Type 80 plate mounting points are provided, compatible with a wide-range of accessories, with optional top-hat providing a standard 35mm pole mount.

Available as standard in black with a black grille or white with a white grille, the Venu Series is also offered in two Natural Wood body finishes, Barewood and Vintage.

#### KEY FEATURES

Passive 8 inch two-way surface-mount loudspeaker

4-pin locking connector and Phoenix connectors with link-through for quick and reliable hook ups

Rotatable asymmetric 90° to 40°H x 60°V high frequency horn

1 inch exit high-frequency compression driver

Robust enclosure made entirely from 15 mm multi-laminate birch plywood

Rotatable badge

Yoke brackets support both vertical and horizontal mounting

T80-style fixing points for compatibility with a wide range of mounting options


Optional top-hat providing a standard 35mm pole mount

Custom RAL finishes are available for both the body and grille, with KROME grille finishes available upon request

**SPECIFICATIONS**

<b>Frequency response<sup>1</sup></b>	63 Hz – 20 kHz	<b>Suggested Minimum Amplifier</b>	Bias Q1+
<b>Maximum Output<sup>2</sup></b>	121 dB cont, 127 dB peak	<b>Weight</b>	12 kg (26.5 lbs)
<b>Nominal Dispersion</b>	90°/40°H x 60°V rotatable	<b>Connections</b>	1 x Phoenix with link out and 1 x 4-pin locking connector with link out
<b>Sensitivity<sup>3</sup></b>	97 dB 1W/1m	<b>Enclosure</b>	15 mm birch plywood
<b>Driver Configuration</b>	1 x 8" LF, 1 x 1" HF compression driver	<b>Finish</b>	Textured polyurethane
<b>Power Handling</b>	300 W AES	<b>Mounting</b>	Yoke bracket, 4 x M8 fixing points for Type 80 plate, optional 35mm top hat
<b>Nominal Impedance</b>	8 Ω		

<sup>1</sup>-10 dB IEC60268-5 <sup>2</sup>Calculated <sup>3</sup>Measured in half space

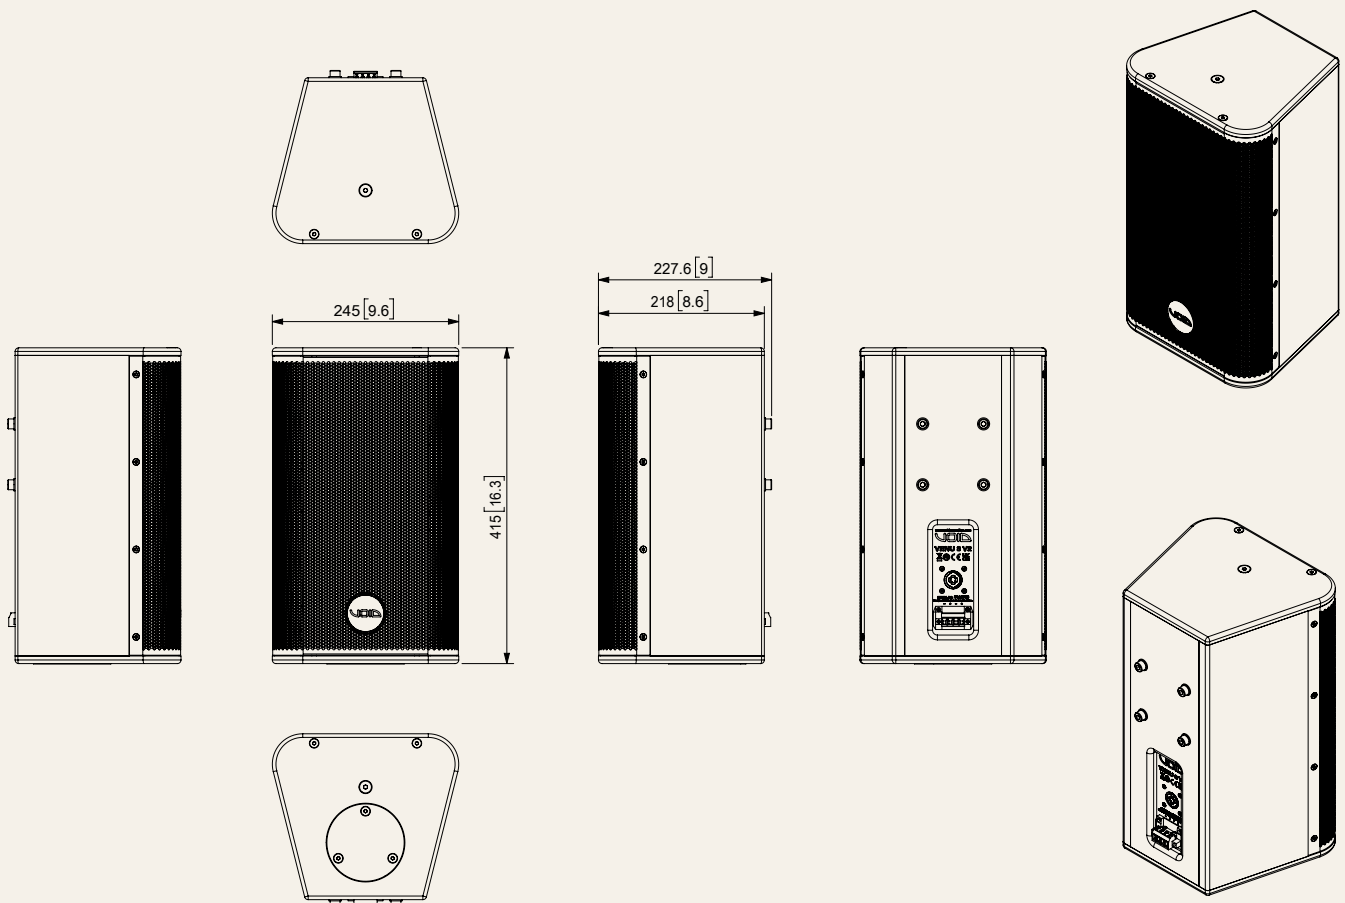

© 2026 Void Acoustics Research Ltd.

This information is subject to change without notice. For the latest online version, visit: [voidacoustics.com](http://voidacoustics.com) Void Acoustics and the Void logo are registered trademarks of Void Acoustics Research Ltd. in the United Kingdom, USA and other countries; all other Void trademarks are the property of Void Acoustics Research Ltd.