

# Venu 10 V2



A high-output 10 inch two-way loudspeaker designed for applications requiring wide coverage



#### FREQUENCY RESPONSE<sup>1</sup>

58 Hz – 20 kHz



#### MAXIMUM OUTPUT<sup>2</sup>

122 dB cont, 128 dB peak



#### NOMINAL DISPERSION

90°/40°H x 60°V rotatable



#### POWER HANDLING

350 W AES

Nightclubs & Bars

Hotels & Resorts

Retail

Gyms & Fitness

Restaurants & Cafés

Residential

The Venu 10 V2 has a robust enclosure and 10 inch driver that delivers strong sound pressure levels, making it well suited to hospitality, retail and leisure spaces.

The Venu 10 V2 features a rotatable high frequency horn, allowing coverage to be adapted depending on orientation. A 10 inch low-frequency driver and 1 inch compression driver deliver increased output and consistent coverage while electronic high-frequency protection supports long term reliability.

Yoke brackets support both vertical and horizontal mounting. Type 80 plate mounting points are provided, compatible with a wide range of accessories, with optional top-hat providing a standard 35mm pole mount.

Available as standard in black with a black grille or white with a white grille, the Venu Series is also offered in two Natural Wood body finishes, Barewood and Vintage.

Custom RAL finishes are available for both the body and grille, with KROME grille finishes available upon request.

## KEY FEATURES

Passive 10 inch two-way surface-mount loudspeaker

4-pin locking connector and Phoenix connectors with link-through for quick and reliable hook ups

Rotatable asymmetric 90° to 40°H x 60°V high frequency horn

1 inch exit high-frequency compression driver

Robust enclosure made entirely from 15 mm multi-laminate birch plywood

Rotatable badge

Yoke brackets support both vertical and horizontal mounting

T80-style fixing points for compatibility with a wide range of mounting options


Optional top-hat providing a standard 35mm pole mount

**SPECIFICATIONS**

<b>Frequency response<sup>1</sup></b>	58 Hz – 20 kHz
<b>Maximum Output<sup>2</sup></b>	122 dB cont, 128 dB peak
<b>Sensitivity<sup>3</sup></b>	97 dB 1W/1m
<b>Nominal Dispersion</b>	90°/40°H x 60°V rotatable
<b>Driver Configuration</b>	1 x 10" LF, 1 x 1" HF compression driver
<b>Power Handling</b>	350 W AES
<b>Nominal Impedance</b>	8 Ω

<b>Suggested Minimum Amplifier</b>	Bias Q1.5+
<b>Weight</b>	16 kg (35.3 lbs)
<b>Connections</b>	1 x Phoenix with link out and 1 x 4-pin locking connector with link out
<b>Enclosure</b>	15 mm birch plywood
<b>Finish</b>	Textured polyurethane
<b>Mounting</b>	Yoke bracket, 4 x M8 fixing points for Type 80 plate, optional 35mm top hat

<sup>1</sup>-10 dB IEC60268-5 <sup>2</sup>Calculated <sup>3</sup>Measured in half space

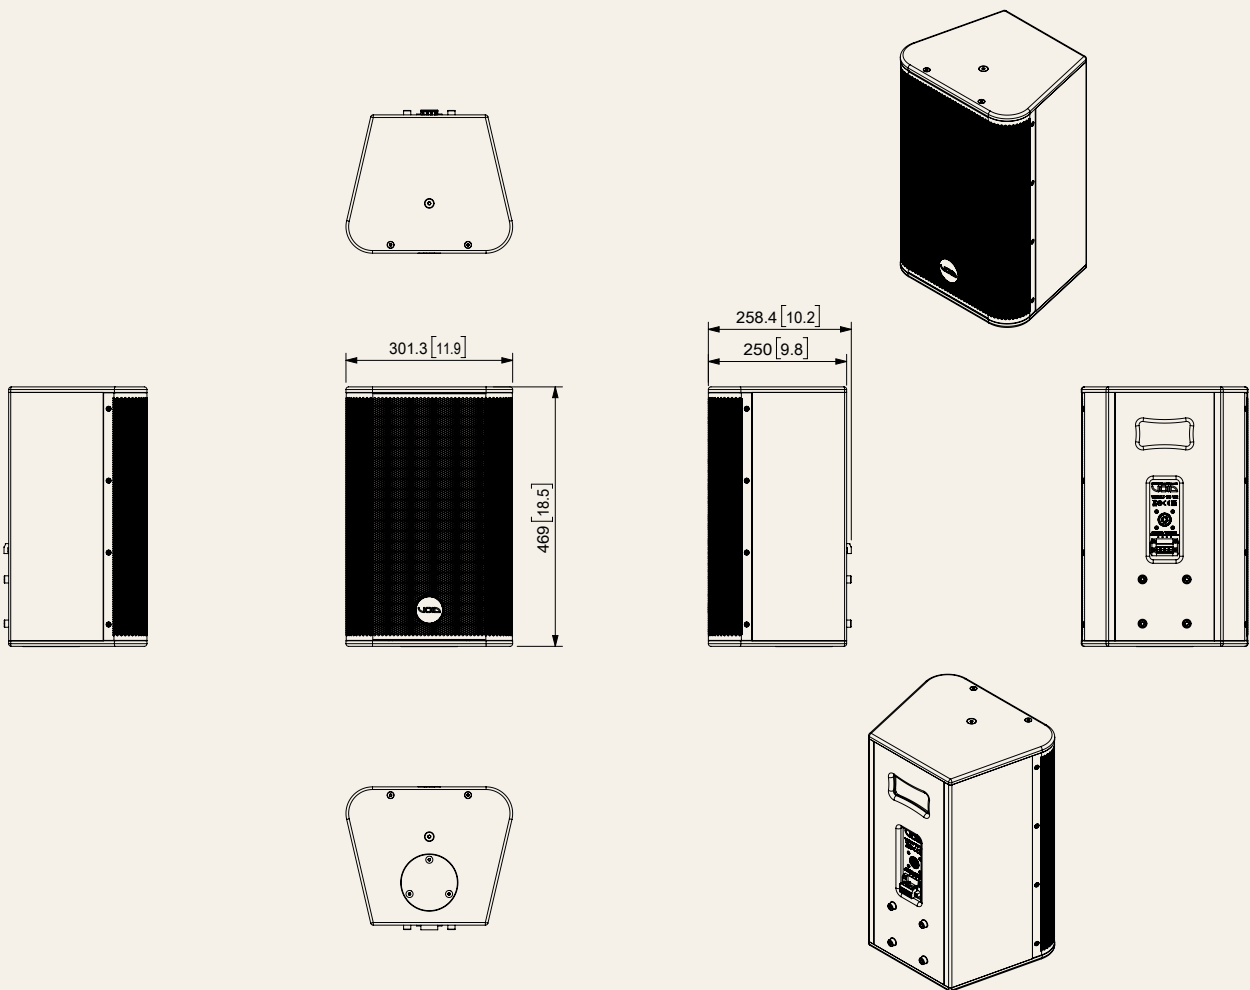

© 2026 Void Acoustics Research Ltd.

This information is subject to change without notice. For the latest online version, visit: [voidacoustics.com](http://voidacoustics.com) Void Acoustics and the Void logo are registered trademarks of Void Acoustics Research Ltd. in the United Kingdom, USA and other countries; all other Void trademarks are the property of Void Acoustics Research Ltd.