


Venu 15 V2



A high-output two-way loudspeaker designed for main system use in medium to large sized venues

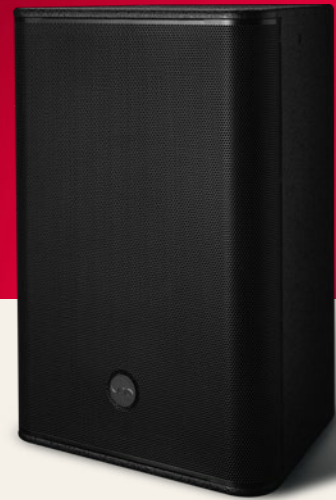

FREQUENCY RESPONSE¹

46 Hz – 20 kHz



MAXIMUM OUTPUT²

125 dB cont, 131 dB peak



NOMINAL DISPERSION

90°/40°H x 60°V rotatable



POWER HANDLING

450 W AES

Nightclubs & Bars

Hotels & Resorts

Retail

Gyms & Fitness

Restaurants & Cafés

Residential

The Venu 15 V2 is the largest full range loudspeaker in the Venu Series, designed to deliver high-output and extended low-frequency performance from a single enclosure. Its 15 inch driver provides impact and presence, making it well suited as a main system in bars, lounges and nightclubs.

The Venu 15 V2 features a rotatable high-frequency waveguide, allowing coverage to be adapted depending on orientation. A 15 inch low-frequency driver and 1 inch compression driver deliver defined, extended low-frequency extension, supporting full range performance from a single enclosure.

Yoke brackets support both vertical and horizontal mounting. Type 80 plate mounting points are provided, compatible with a wide-range of accessories, with optional top-hat providing a standard 35mm pole mount.

Available as standard in black with a black grille or white with a white grille, the Venu Series is also offered in two Natural Wood body finishes, Barewood and Vintage.

KEY FEATURES

Passive 15 inch two-way surface-mount loudspeaker

4-pin locking connector and Phoenix connectors with link-through for quick and reliable hook ups

Rotatable asymmetric 90° to 40°H x 60°V high frequency horn

1 inch exit high-frequency compression driver

Robust enclosure made entirely from 15 mm multi-laminate birch plywood

Rotatable badge

Yoke brackets support both vertical and horizontal mounting

T80-style fixing points for compatibility with a wide range of mounting options


Optional top-hat providing a standard 35mm pole mount

Custom RAL finishes are available for both the body and grille, with KROME grille finishes available upon request

SPECIFICATIONS

Frequency response¹	46 Hz – 20 kHz	Suggested Minimum Amplifier	Bias Q1.5+
Maximum Output²	125 dB cont, 131 dB peak	Weight	31 kg (68.3 lbs)
Sensitivity³	99 dB 1W/1m	Connections	1 x Phoenix with link out and 1 x 4-pin locking connector with link out
Nominal Dispersion	90°/40°H x 60°V rotatable	Enclosure	15 mm birch plywood
Driver Configuration	1 x 15" LF, 1 x 1" HF compression driver	Finish	Textured polyurethane
Power Handling	450 W AES	Mounting	Yoke bracket, 4 x M8 fixing points for Type 80 plate, optional 35mm top hat
Nominal Impedance	8 Ω		

¹-10 dB IEC60268-5 ²Calculated ³Measured in half space

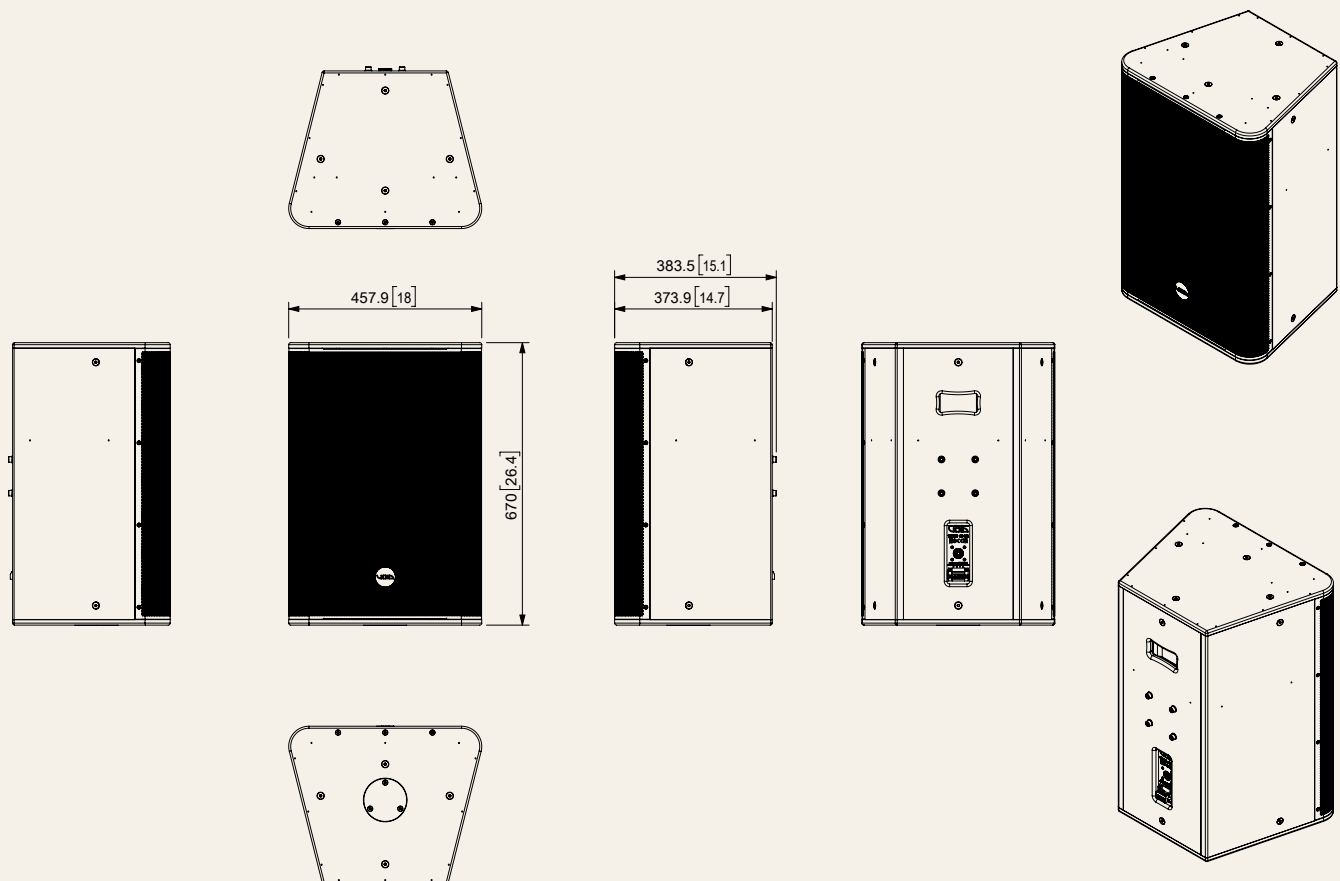

© 2026 Void Acoustics Research Ltd.

This information is subject to change without notice. For the latest online version, visit: voidacoustics.com Void Acoustics and the Void logo are registered trademarks of Void Acoustics Research Ltd. in the United Kingdom, USA and other countries; all other Void trademarks are the property of Void Acoustics Research Ltd.