

Venu 112 V2



A compact 12 inch subwoofer delivering controlled low-frequency performance for installation environments



FREQUENCY RESPONSE¹

38 Hz – Preset dependent



MAXIMUM OUTPUT²

126 dB cont, 132 dB peak



SENSITIVITY³

99 dB 1W/1m



POWER HANDLING

600 W AES

Nightclubs & Bars

Hotels & Resorts

Retail

Gyms & Fitness

Restaurants & Cafés

Residential

The Venu 112 V2 is designed for installation environments requiring controlled low-frequency performance without compromising space or visual integration.

The Venu 112 V2 features a reflex-loaded 12 inch high-excursion low-frequency driver with a 4 inch voice coil, delivering controlled bass response. Its enclosure design supports clean, low-frequency reproduction across a wide range of hospitality and leisure applications.

A recessed rear connector panel allows the Venu 112 to be positioned directly against walls. Yoke bracket mounting, T75-style fixing points and an optional top-hat support a wide range of installation and deployment configurations.

Available as standard in black with a black grille or white with a white grille, the Venu V2 range is also offered in two Natural Wood body finishes, Barewood and Vintage.

Custom RAL finishes are available for both the body and grille, with KROME grille finishes available upon request.

KEY FEATURES

Reflex-loaded single 12 inch subwoofer

Tough, high-excursion transducer with 4 inch voice coils

Rotatable badge

4-pin locking connector and Phoenix connectors with link-through for quick and reliable hook ups

Recessed rear connector panel that allows the enclosure to be placed against a rear wall

Robust enclosure made entirely from 15 mm multi-laminate birch plywood

Yoke brackets support both vertical and horizontal mounting

T75-style fixing points for compatibility with a wide range of mounting options


Optional top-hat providing a standard M20 mounting point

SPECIFICATIONS

Frequency response¹	38 Hz – Preset dependent
Maximum Output²	126 dB cont, 132 dB peak
Sensitivity³	99 dB 1W/1m
Nominal Dispersion	Array dependent
Driver Configuration	1 x 12" LF
Power Handling	600 W AES
Nominal Impedance	8 Ω

Suggested Minimum Amplifier	Bias Q1.5+
Weight	27 kg (59.5 lbs)
Connections	1 x Phoenix with link out and 1 x 4-pin locking connector with link out
Enclosure	15 mm birch plywood
Finish	Textured polyurethane
Mounting	Optional M20 top hat, Yoke bracket, Type 75 plate

¹-10 dB IEC60268-5 ²Calculated ³Measured in half space

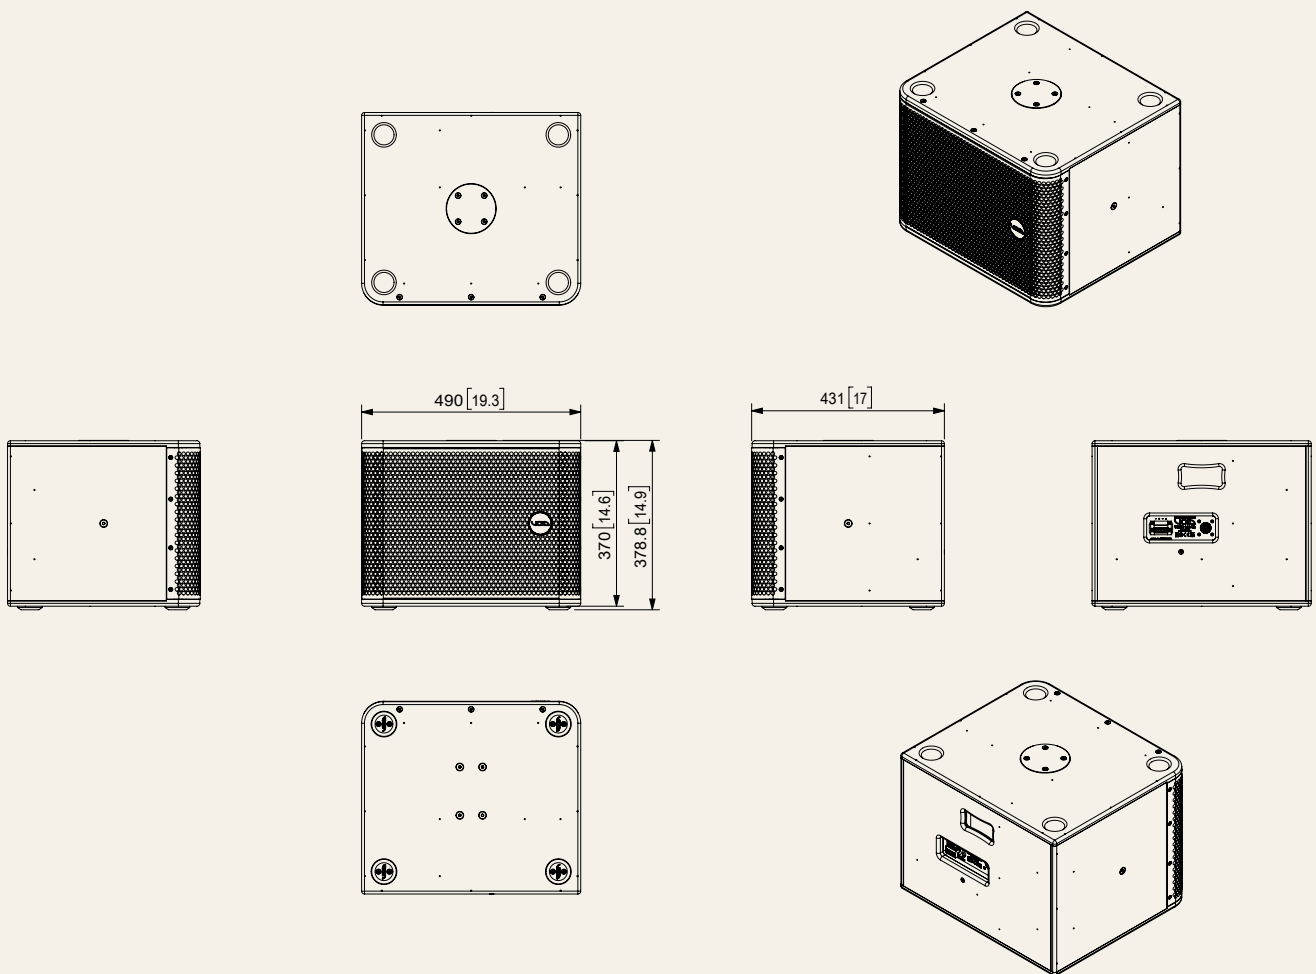

© 2026 Void Acoustics Research Ltd.

This information is subject to change without notice. For the latest online version, visit: voidacoustics.com Void Acoustics and the Void logo are registered trademarks of Void Acoustics Research Ltd. in the United Kingdom, USA and other countries; all other Void trademarks are the property of Void Acoustics Research Ltd.