

Venu 14 V2



A coaxial point-source loudspeaker with waveguide control, delivering premium-quality sound in a compact enclosure



FREQUENCY RESPONSE¹

50 Hz – 20 kHz



MAXIMUM OUTPUT²

124 dB cont, 130 dB peak



NOMINAL DISPERSION

70°H x 50°V



POWER HANDLING

400 W AES

Nightclubs & Bars

Hotels & Resorts

Retail

Gyms & Fitness

Restaurants & Cafés

Residential

The Venu 14 V2 introduces true point source audio to the Venu Series through its coaxial driver design. By aligning low and high-frequencies from a single acoustic centre, it delivers precise sound reproduction with improved coherence and consistency across the listening area.

The Venu 14 V2 features an optimised rotatable waveguide, allowing precise control of dispersion across different mounting orientations. Its 13.5 inch coaxial driver with a 1.4 inch high-frequency compression element delivers smooth, linear response with strong output and extended low-frequency performance.

Yoke brackets support both vertical and horizontal mounting. Type 80 plate mounting points are provided, compatible with a wide-range of accessories, with optional top-hat providing a standard 35mm pole mount.

Available as standard in black with a black grille or white with a white grille, the Venu Series is also offered in two Natural Wood body finishes, Barewood and Vintage.

KEY FEATURES

1 x 13.5 inch, 1 x 1.4 inch coaxial driver

4-pin locking connector and Phoenix connectors with link-through for quick and reliable hook ups

Controlled 70°H x 50°V dispersion with optimised rotatable waveguide

Premium coaxial driver with neodymium magnet and FEM enhanced motor design

Robust enclosure made entirely from 15 mm multi-laminate birch plywood

Rotatable badge

Yoke brackets support both vertical and horizontal mounting

T80-style fixing points for compatibility with a wide range of mounting options


Optional top-hat providing a standard 35mm pole mount

Custom RAL finishes are available for both the body and grille, with KROME grille finishes available upon request

SPECIFICATIONS

Frequency response¹	50 Hz – 20 kHz	Suggested Minimum Amplifier	Bias Q1.5+
Maximum Output²	124 dB cont, 130 dB peak	Weight	16.5 kg (36.4 lbs)
Sensitivity³	99 dB 1W/1m	Connections	1 x Phoenix with link out and 1 x 4-pin locking connector with link out
Nominal Dispersion	70°H x 50°V	Enclosure	15 mm birch plywood
Driver Configuration	1 x 13.5" LF, 1 x 1.4" HF coaxial compression driver	Finish	Textured polyurethane
Power Handling	400 W AES	Mounting	Yoke bracket, 4 x M8 fixing points for Type 80 plate, optional 35mm top hat
Nominal Impedance	8 Ω		

¹-10 dB IEC60268-5 ²Calculated ³Measured in half space

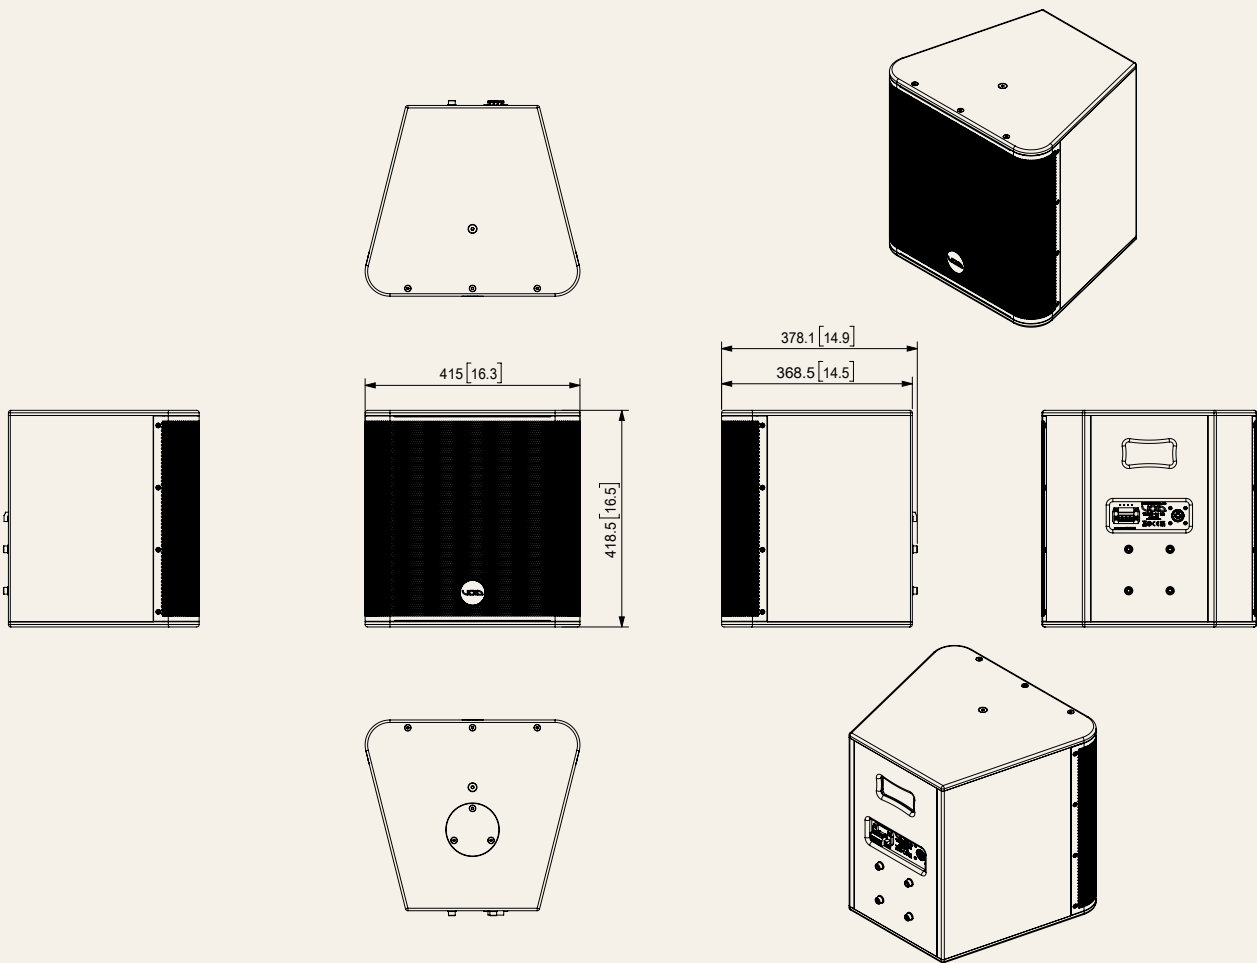

© 2026 Void Acoustics Research Ltd.

This information is subject to change without notice. For the latest online version, visit: voidacoustics.com Void Acoustics and the Void logo are registered trademarks of Void Acoustics Research Ltd. in the United Kingdom, USA and other countries; all other Void trademarks are the property of Void Acoustics Research Ltd.