

Air 12



IP-rated, flush mounted coaxial loudspeaker with striking sculpted design in a low-resonance fibreglass enclosure



FREQUENCY RESPONSE¹

75 Hz - 20 kHz



MAXIMUM OUTPUT²

124 dB cont, 130 dB peak



NOMINAL DISPERSION

80°H x 80°V



POWER HANDLING

400 W AES

Nightclubs & Bars

Hotels & Resorts

Beach & Poolside

Gyms & Fitness

Restaurants & Cafés

Residential

Retail

The Air 12 is a compact IP-54 rated coaxial, flush mounted loudspeaker. Designed for controlled, even sound coverage in a visually distinctive form.

A high-performance coaxial driver delivers a uniform radiation pattern for consistent sound coverage. Controlled 80°H x 80°V dispersion supports even distribution, with a 400 W AES power handling coaxial driver featuring a Kevlar diaphragm and anti-resonance damping for high-quality sound across a range of applications.

Designed for a range of environments, the Air 12 is supplied with a low-profile flush-mount bracket, positioning the Air 12 at a fixed 30° declining angle. An optional tilt and swivel bracket is available.

Available as standard in red with a black grille, black with a black grille, and white with a white grille. Custom RAL and KROME finishes are available upon request.

KEY FEATURES

Visually striking, sculpted design in a low-resonance fibreglass enclosure

Compact two-way reflex system

High-performance coaxial driver with optimised neodymium motor design

Controlled 80°H x 80°V dispersion for consistent coverage

400 W AES power handling

Weather-resistant input glands with Phoenix connector and link-through functionality

Weather protected with an IP-54 rating

Hydrophobic membrane for enhanced ingress protection


T80-style fixing points for compatibility with a wide range of mounting options

Supplied with a low-profile flush-mount bracket, positioning the Air 12 at a fixed 30° declining angle

SPECIFICATIONS

Frequency response¹	75 Hz - 20 kHz	Weight	12.5 kg (27.6 lbs)
Maximum Output²	124 dB cont, 130 dB peak	IP Rating	IP-54
Nominal Dispersion	80°H x 80°V	Connections	Phoenix connector with link out
Sensitivity³	98 dB 1W/1m	Enclosure	Fibreglass composite
Driver Configuration	1 x 12" LF, 1 x 1" coaxial	Finish	Smooth cellulose
Power Handling	400 W AES	Mounting	Low profile flush-mount bracket included, Type 80 plate
Nominal Impedance	8 Ω		
Suggested Minimum Amplifier	Bias Q1.5+		

¹-10 dB IEC60268-5 ²Calculated ³Measured in half space

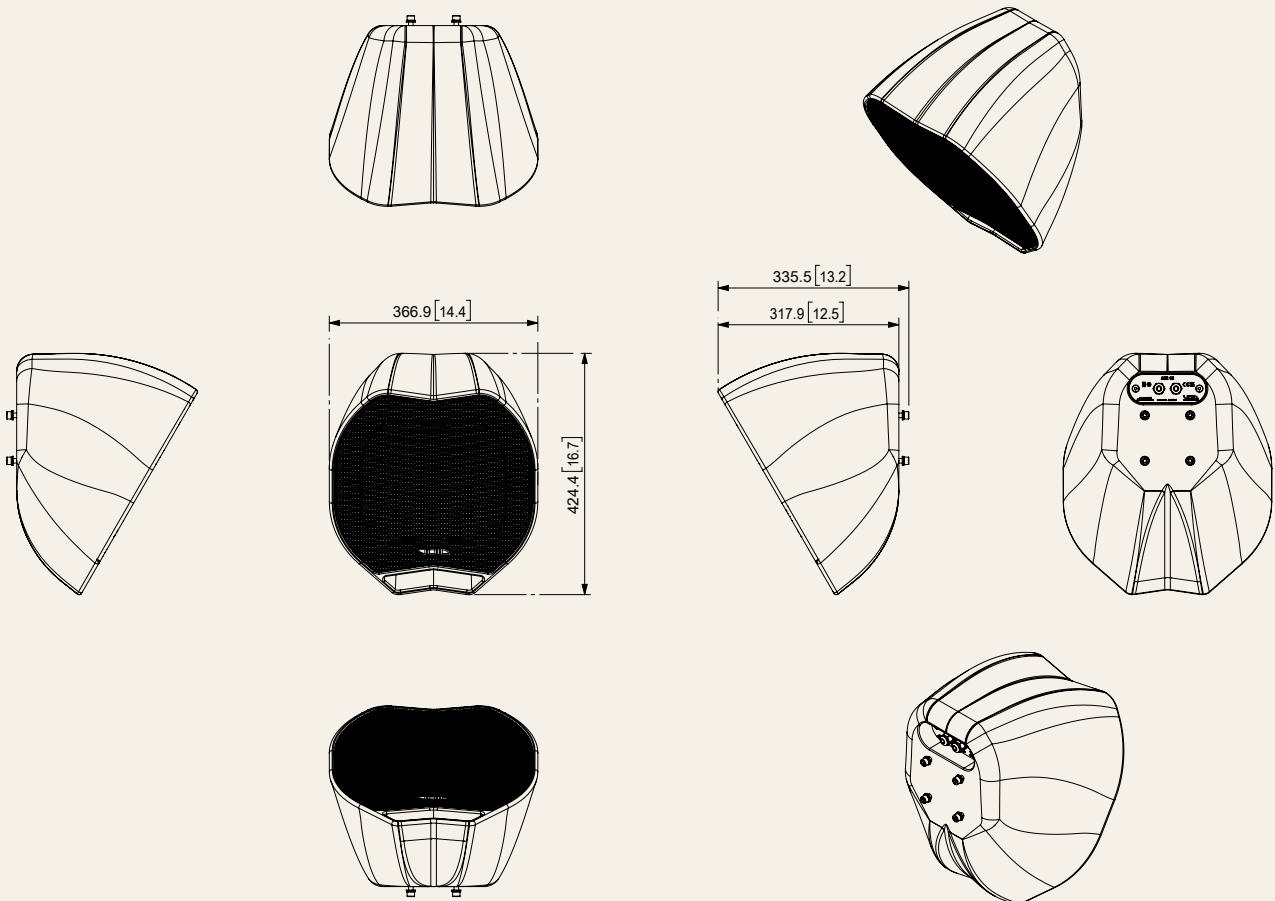

© 2026 Void Acoustics Research Ltd.

This information is subject to change without notice. For the latest online version, visit: voidacoustics.com Void Acoustics and the Void logo are registered trademarks of Void Acoustics Research Ltd. in the United Kingdom, USA and other countries; all other Void trademarks are the property of Void Acoustics Research Ltd.