SPECIFICATION SHEET

Cyclone 8 V2



A compact, lightweight 8-inch coaxial loudspeaker designed for easy installation and reliable indoor and outdoor performance.

FREQUENCY RESPONSE[1]
75 Hz - 20 kHz

MAXIMUM OUTPUT[2]
118 dB cont, 124 dB peak

NOMINAL DISPERSION
100°H x 100°V

POWER HANDLING
200 W AES

Beach & Poolside | Hotels & Resorts | Residential | Gyms & Fitness | Restaurants & Cafés | Retail

The Cyclone 8 V2 brings a new coaxial compression driver to the Cyclone Series, combining high-performance sound with a compact, lightweight design.

Designed for ease of installation, the Cyclone 8 V2 features T80-style fixing points compatible with a wide range of mounting accessories, giving installers greater flexibility across different applications.

With higher sensitivity and wider coverage than the Cyclone 8 V1, it delivers clear, consistent sound across a greater area. Its combination of compact size and broad coverage makes the Cyclone 8 V2 well suited to small and medium-sized spaces where sound quality and efficient use of space are equally important.

Available as standard in red with a black grille, black with a black grille, and white with a white grille. Custom RAL and KROME finishes are available upon request.

KEY FEATURES


- Passive 8 inch coaxial loudspeaker
- Weather-resistant input glands with Phoenix connector and link-through functionality
- Low-resonance fibreglass composite construction
- Wide 100° H x 100° V conical dispersion
- Stainless steel grille and fasteners
- T80-style fixing points for compatibility with a wide range of mounting options
- Weather protected with an IP-55 rating
- UV-resilient finish
- Non-corrosive ABS driver basket design and weather treated diaphragm
- Hydrophobic membrane for enhanced ingress protection

SPECIFICATIONS

Frequency Response[1]	75 Hz - 20 kHz
Maximum Output[2]	118 dB cont, 124 dB peak
Nominal Dispersion	100°H x 100°V
Sensitivity[3]	96 dB 1W/1m
Driver Configuration	1 x 8” LF, 1 x 1” HF coaxial compression driver
Power Handling	200 W AES
Nominal Impedance	8 Ω
Suggested Minimum Amplifier	Bias Q1+

Weight	Net 9.7 kg (21.4 lbs) Gross 12 kg (26.5 lbs)
Dimensions (H x W x D)	286 x 341 x 310 mm 11.2 x 13.4 x 12.2 in
IP Rating	IP-55
Connections	Phoenix connector with link out
Enclosure	Fibreglass composite
Finish	Smooth cellulose
Mounting	Type 80 plate

[1]-10 dB IEC60268-5 [2]Calculated [3]Measured in half space

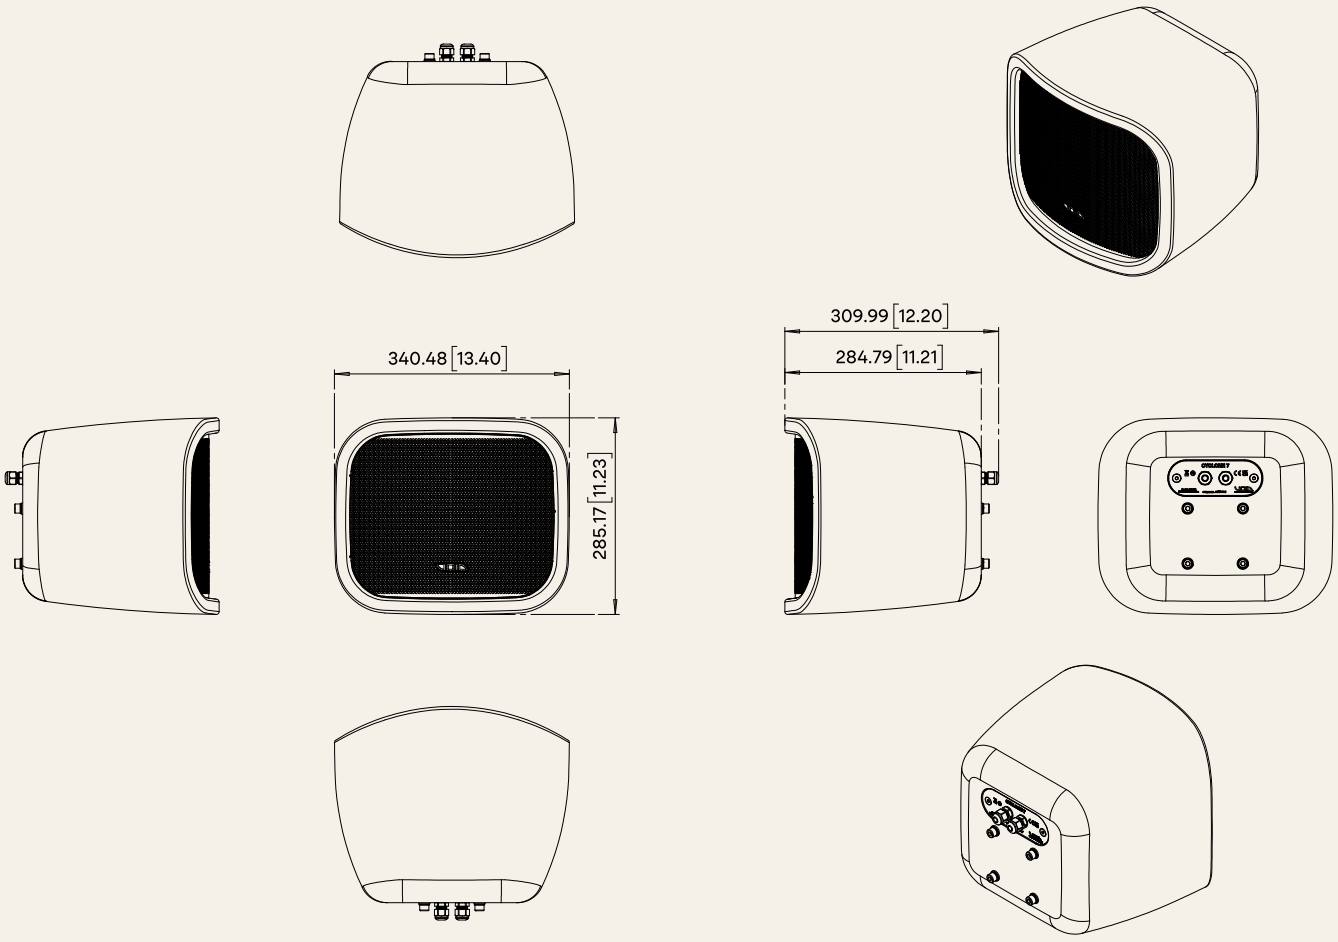

© 2026 Void Acoustics Research Ltd.

This information is subject to change without notice. For the latest online version, visit: **voidacoustics.com** Void Acoustics and the Void logo are registered trademarks of Void Acoustics Research Ltd. in the United Kingdom, USA and other countries; all other Void trademarks are the property of Void Acoustics Research Ltd.