SPECIFICATION SHEET

Cyclone 118



A weather-resistant, 18-inch reflex-loaded subwoofer providing dedicated low-frequency support for the Cyclone Series across indoor and outdoor installations

FREQUENCY RESPONSE[1]
30 Hz - Preset dependent

MAXIMUM OUTPUT[2]
126 dB cont, 132 dB peak

SENSITIVITY[3]
97 dB 1W/1m

POWER HANDLING
1200 W AES

Beach & Poolside | Hotels & Resorts | Residential | Gyms & Fitness | Restaurants & Cafés | Retail

The Cyclone 118 is an IP-55 rated subwoofer suitable for use in both indoor and outdoor applications.

Its weather-resistant construction incorporates stainless steel fittings and a UV-resilient finish, making it suitable for outdoor installations. Its distinctive Cyclone Series styling makes it a natural fit for resorts, poolside areas and hospitality spaces where sound performance and aesthetics are equally important.

Featuring the distinctive smooth, sculpted forms of the Cyclone Series, the Cyclone 118 combines striking aesthetics with practical durability.

Available as standard in red with a black grille, black with a black grille, and white with a white grille. Custom RAL and KROME finishes are available upon request.

KEY FEATURES

- Reflex loaded 18 inch subwoofer
- Weather-resistant input glands with Phoenix connector and link-through functionality
- Low-resonance fibreglass composite construction
- Designed to add high-power, low frequency support to Cyclone Series loudspeakers
- Stainless steel grille and fasteners
- Weather protected with an IP-55 rating
- UV-resilient finish

PRELIMINARY


SPECIFICATIONS

Frequency response[1]	30 Hz - Preset dependent
Maximum Output[2]	126 dB cont, 132 dB peak
Nominal Dispersion	Omnidirectional
Sensitivity[3]	97 dB 1W/1m
Driver Configuration	1 x 18” LF
Power Handling	1200 W AES
Nominal Impedance	8 Ω
Suggested Minimum Amplifier	Bias Q2+

[1]-10 dB IEC60268-5 [2]Calculated [3]Measured in half space

Weight	Net 45.6 kg (100.5 lbs) Gross 55.8 kg (123.2 lbs)
Dimensions (H x W x D)	556 x 674.1 x 570 mm 21.9 x 26.5 x 22.4 in
IP Rating	IP-55
Connections	Phoenix connector with link out
Enclosure	Fibreglass composite
Finish	Smooth cellulose

PRELIMINARY

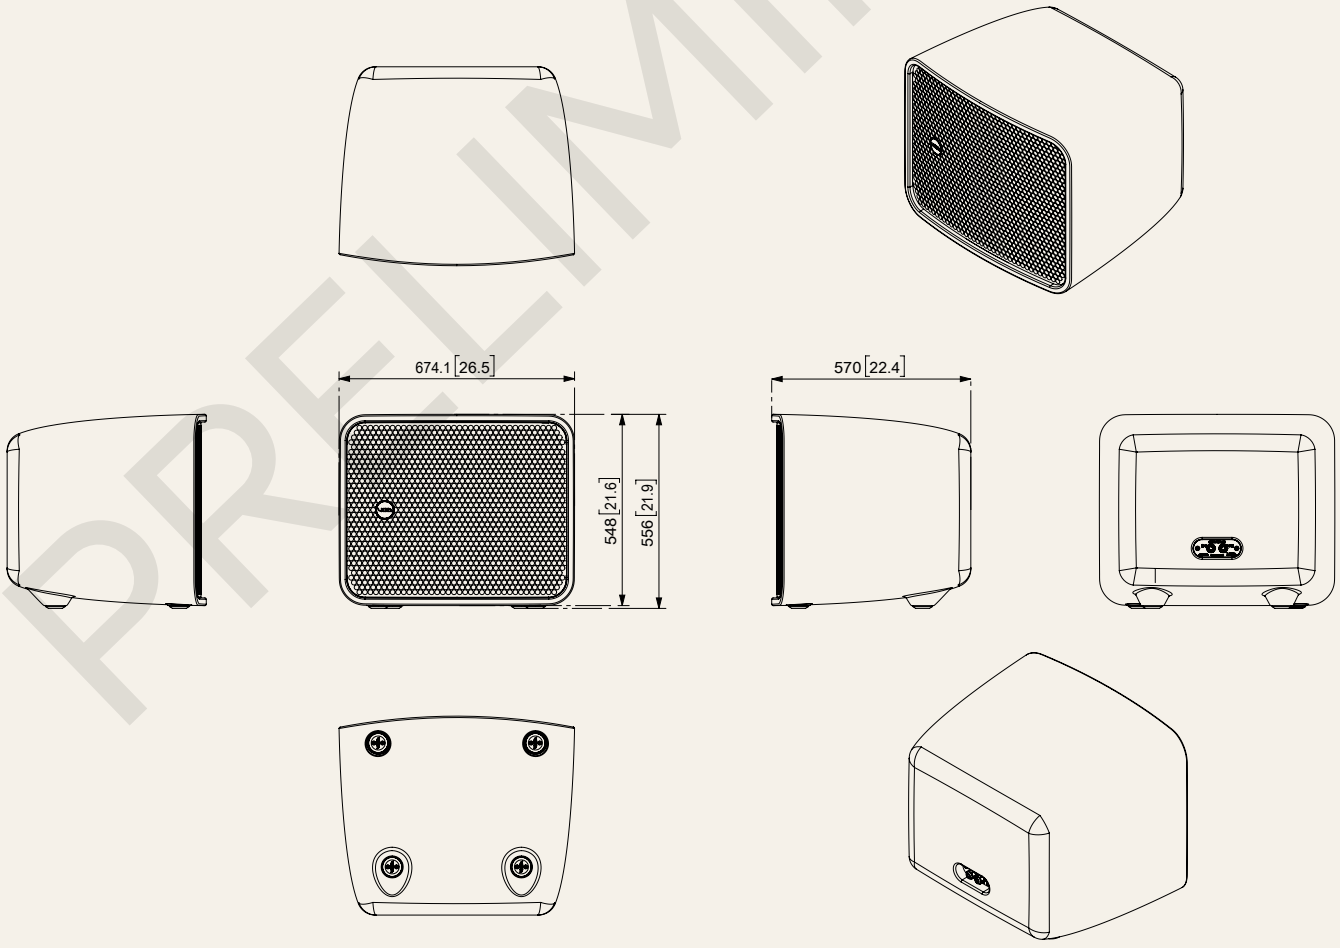

© 2026 Void Acoustics Research Ltd.

This information is subject to change without notice. For the latest online version, visit: **voidacoustics.com** Void Acoustics and the Void logo are registered trademarks of Void Acoustics Research Ltd. in the United Kingdom, USA and other countries; all other Void trademarks are the property of Void Acoustics Research Ltd.